INEIGHT

Explore API Documentation

SelfService_Billings_BillingsLabourAssociation

Version 1.0

Last Modified: 01-Oct-2025

Last Modified By: Litzy Mora

© 2025 InEight, Inc. All rights reserved.

Change Log

This changelog only contains significant or notable changes to the revision. Any editorial type changes or minor changes are not included.

Revision	Change Date	Description	Modified By
1.0	18-Feb-2024	Initial Release	Litzy Mora

Contents

Change Log....2
Overview....3
Relationships and Dependencies....3
API Detail....3
Supported Filters....3
Fields....3
Field Descriptions....4
Sample....4

Overview

This API contains information regarding Labour associations within Billings.

Relationships and Dependencies

From: Table	To: Table	Relationship	Cardinality[1]	Comment
SelfService_Billings_BillingsLaborAssociation(LA)	SelfService_Billings_BillingsLabor(L)	LA. BillingsLabour UnitID=L. BillingsLabourUnitID	M:1	
SelfService_Billings_BillingsLaborAssociation(LA)	SelfService_Billings_BillingsBatch(B)	LA. BillingsBatchID= B. BillingsBatchID	M:1	

API Detail

Direction		From Project Suite
Pagination		50,000 Rows
Frequency		All Reporting APIs are used by calling a GET method at an interval determined by the customer. InEight suggests using these APIs on an infrequent basis (once per day) to avoid potential performance impact to live systems when the returned data set could be large.
Trigger Method(s)		All default OData filters are supported
Average Payload Size		Depends on date range selected
APIM Name		SelfService_Billings_BillingsLabourAssociation
Replicate View		SelfService.vwBillingsBillingsLabourAssociation
Data Refresh/Delta/Incremental Loads		This data refreshes once per day overnight.
Project Suite	**Starting Version**	24.11
	Ending Version	N/A

Supported Filters

All default OData filters are supported by this API.

Fields

Name	Data Type	Char Max Length	Numeric Precision	Scale	Is Nullable	PK
BillingsLabourAssociationID	bigint				N	X
BillingsLabourUnitID	bigint				N	
BillingsBatchID	bigint				N	
OrganizationCode	varchar	5			N	
CreatedById	bigint				N	
CreatedDate	datetimeoffset				N	

[1] *1:M = One to Many, 1:1 = One to One, M:1 = Many to one*

ModifiedById	bigint				N	
ModifiedDate	datetimeoffset				N	
IsActive	bit				N	

Field Descriptions

Name	Description	Example
BillingsLabourAssociationID	Unique identifier assigned to each record in the table	2386947
BillingsLabourUnitID	Identifier of the Labour record that this record references	1189982
BillingsBatchID	Identifier of the Batch record that this record references	8386947
OrganizationCode	Organization code splitting data into legal entities	SO
CreatedById	System generated Id, will always represent the system, not actual users. This field is for internal use only	1
CreatedDate	Date/timestamp record is entered	2024-02-13T08:05:38.547135Z
ModifiedById	System generated Id, will always represent the system, not actual users. This field is for internal use only	1
ModifiedDate	Date/timestamp record is modified	2024-04-17T12:55:38.547135Z
IsActive	Indicates if record is active or deleted	TRUE

Sample

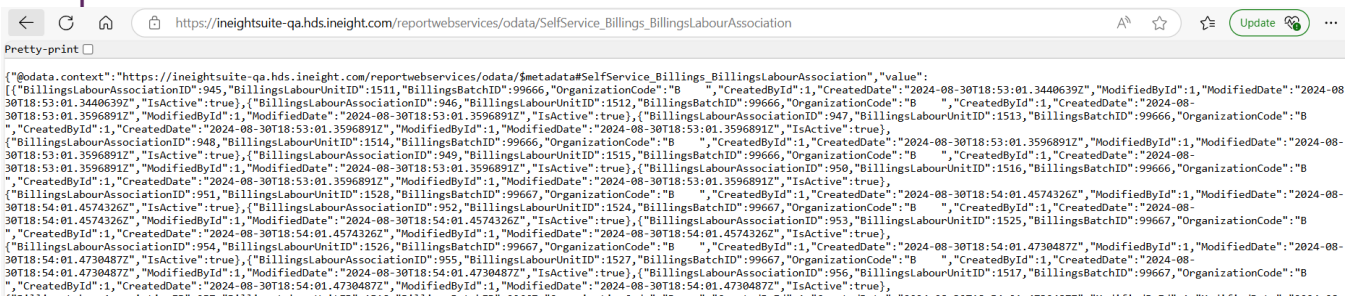

Data Validation