INEIGHT

Explore API Documentation

SelfService_Completion_ModuleText

Version 1.0

Last Modified: 22-Oct-24

Last Modified By: Litzy Mora

© 2024 InEight, Inc. All rights reserved.

Change Log

This changelog only contains significant or notable changes to the revision. Any editorial type changes or minor changes are not included.

Revision	Change Date	Description	Modified By
1.0	22-Oct-2024	Initial release	Litzy Mora

Contents

Change Log....2
Overview....3
Relationships and Dependencies....3
API Detail....3
Supported Filters....3
Fields....4
Field Descriptions....4
Sample....5

Overview

The Module text API is designed to expose translated Module metadata from Completions. **When using this API, please filter by Language ID or Language code to eliminate duplicates.**

Relationships and Dependencies

From: Table	To: Table	Relationship	Cardinality[1]	Comment
SelfService_Completion_ModuleText (MT)	SelfService_Completion_ModuleData (MD)	MT.InspectModuleId= MD.InspectModuleId	M:1	
SelfService_Completion_ModuleText (MT)	SelfService_Completion_GeneralHeaderData (GHD)	GHD.InspectModuleId= MT.InspectModuleId	M:1	

API Detail

Direction		From Project Suite
Pagination		50,000 Rows
Frequency		All Reporting APIs are used by calling a GET method at an interval determined by the customer. InEight suggests using these APIs on an infrequent basis (once per day) to avoid potential performance impact to live systems when the returned data set could be large.
Trigger Method(s)		All default OData filters are supported
Average Payload Size		Depends on date range selected
APIM Name		SelfService_Completion_ModuleText
Replicate View		[SelfService].[vwCompletionsModuleText]
Data Refresh/Delta/Incremental Loads		The data in this API will refresh in twenty minutes or less from the time it is entered.
Project Suite	**Starting Version**	23.2
	Ending Version	N/A

Supported Filters

All default OData filters are supported by this API.

[1] *1:M = One to Many, 1:1 = One to One, M:1 = Many to one*

Fields

Name	DataType	CharMaxLength	NumericPrecision	Scale	IsNullable	PK
InspectModuleTextId	bigint	8	19	0	N	X
LanguageId	bigint	8	19	0	Y	
InspectModuleId	bigint	8	19	0	Y	
LanguageCode	nvarchar	25	0	0	Y	
ModuleName	nvarchar	200	0	0	Y	
ModuleDescription	nvarchar	4000	0	0	Y	
CreatedById	bigint	8	19	0	Y	
CreatedDateChar	varchar	35	0	0	Y	
ModifiedById	bigint	8	19	0	Y	
ModifiedDateChar	varchar	35	0	0	Y	
IsActive	bit	1	1	0	N	

Field Descriptions

Name	Description	Example
InspectModuleTextId	Identifier assigned to each record in this API	2
LanguageId	Id of language being used	1
InspectModuleId	Identifier associated to each Module	2
LanguageCode	Code for language being used	en
ModuleName	Text name given to a Module in Completions	Quality
ModuleDescription	Text description of what each Module captures	A module to track and manage quality related business processes\.
CreatedById	Indicates Id of entity that created the record	1
CreatedDateChar	Indicates date record created	2019-08-17 14:43:32.346169 +00:00
ModifiedById	Indicates Id of entity that modified	207318
ModifiedDateChar	Indicates latest date the record was modified	2024-10-09 11:41:43.881726 +00:00
IsActive	Indicates if a record is active (1) or inactive (0)	1

Sample


```
{
    "InspectModuleTextId": 2,
    "LanguageId": 1,
```

```
    "InspectModuleId": 2,
    "LanguageCode": "en",
    "ModuleName": "Quality",
    "ModuleDescription": "A module to track and manage quality related business processes\\.",
    "CreatedById": 1,
    "CreatedDateChar": "2019-08-17 14:43:32.346169 +00:00",
    "ModifiedById": 207318,
    "ModifiedDateChar": "2024-10-09 11:41:43.881726 +00:00",
    "IsActive": true
}
```


Validation
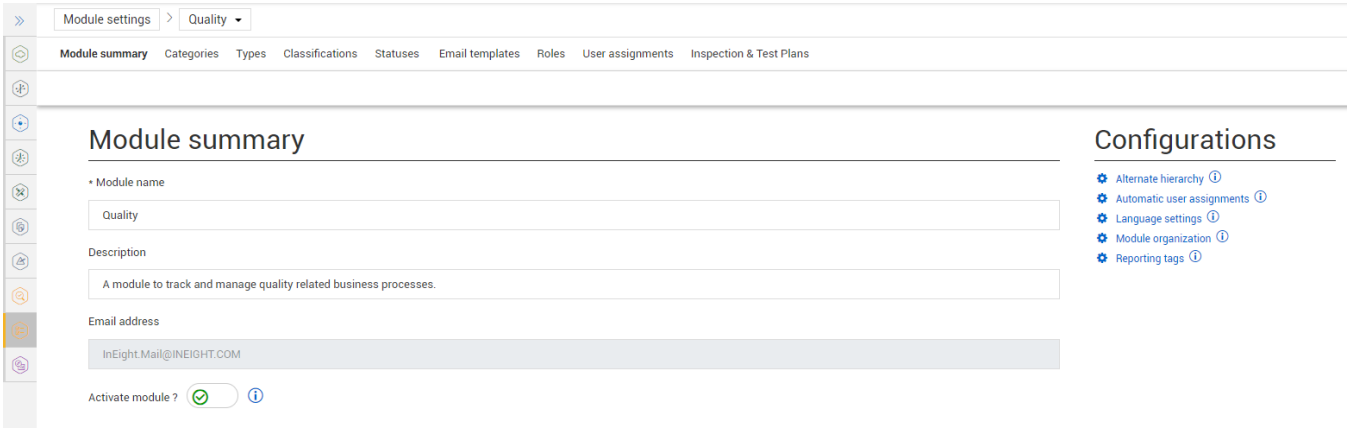
This data can be validated by navigating to the Module settings > Module summary tab