Explore API Documentation

SelfService_Completion_QuestionReportingTag

Version 1.0

Last Modified: 22-Oct-2024

Last Modified By: Litzy Mora

© 2024 InEight, Inc. All rights reserved.

Change Log

This changelog only contains significant or notable changes to the revision. Any editorial type changes or minor changes are not included.

Revision	Change Date	Description	Modified By
1.0	22-Oct-2024	Initial release	Litzy Mora

Contents

Change Log....2
Overview....3
Relationships and Dependencies....3
API Detail....3
Supported Filters....4
Fields....4
Field Descriptions....4
Sample....5
Data Validation....5

Overview

The Question Reporting Tag endpoint is intended to connect the questions on a Completions form with the reporting tag associated to them.

**to retrieve this information at an answer level, please see the instructions in the SelfService_Completions_UserReportingTagAssignment document.

Relationships and Dependencies

From: Table	To: Table	Relationship	Cardinality[1]	Comment
SelfService_ Completion_ QuestionReportngTag (QRT)	SelfService_ Completion_ EventTaskData (ETD)	QRT.QuestionId = ETD.QuestionId	1:M	
SelfService_ Completion_ QuestionReportngTag (QRT)	SelfService_ Completion_ ReportingTag (RT)	QRT.ReportingTagId = RT.ReportingTagId	M:1	

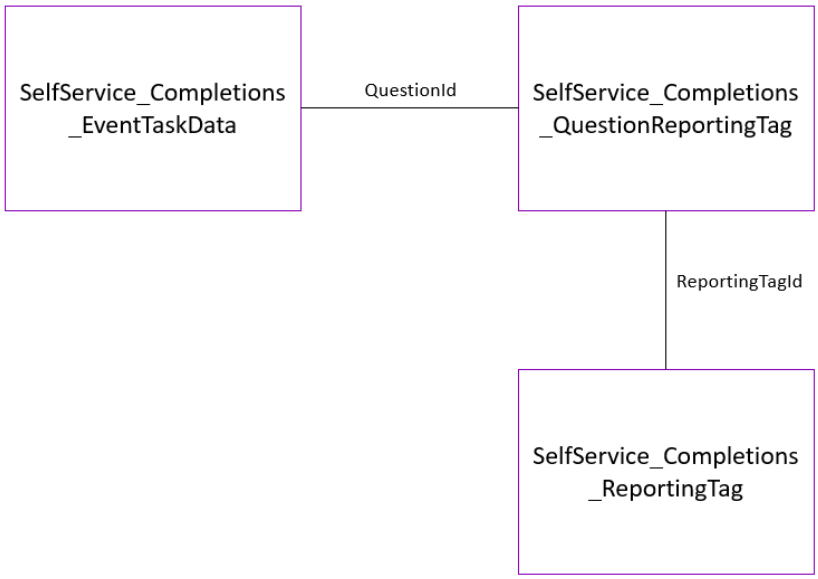

API Detail

Direction	From Project Suite
Pagination	50,000 Rows
Frequency	All Reporting APIs are used by calling a GET method at an interval determined by the customer. InEight suggests using these APIs on an infrequent basis (once

[1] *1:M = One to Many, 1:1 = One to One, M:1 = Many to one*

		per day) to avoid potential performance impact to live systems when the returned data set could be large.
Trigger Method(s)		All default OData filters are supported
Average Payload Size		Depends on date range selected
APIM Name		SelfService_Completion_QuestionReportingTag
Replicate View		[SelfService].[vwCompletionsQuestionReportingTag]
Data Refresh/Delta/Incremental Loads		The data in this API will refresh in twenty minutes or less from the time it is entered.
Project Suite	**Starting Version**	23.2
	Ending Version	N/A

Supported Filters

All default OData filters are supported by this API.

Fields

Name	DataType	CharMaxLength	NumericPrecision	Scale	IsNullable	PK
QuestionReportingTagId	bigint	8	19	0	N	X
QuestionId	bigint	8	19	0	Y	
ReportingTagId	bigint	8	19	0	Y	
IsActive	bit	1	1	0	N	
CreatedById	bigint	8	19	0	Y	
CreatedDateChar	varchar	35	0	0	Y	
CreatedDate	datetimeoffset	10	34	7	Y	
ModifiedById	bigint	8	19	0	Y	
ModifiedDateChar	varchar	35	0	0	Y	
ModifiedDate	datetimeoffset	10	34	7	Y	

Field Descriptions

Name	Description	Example
QuestionReportingTagId	Unique identifier associated to every record in this API	3646
QuestionId	Unique identifier associated to each question	330112
ReportingTagId	Unique identifier associated to each reporting tag in Completions	3
IsActive	Indicates if the record is active or soft deleted	0 = False 1= True

CreatedById	Unique identifier of the individual that created the record	95578
CreatedDateChar	Date record was created (Varchar datatype)	2020-11-03 23:44:00.000000 +00:00
CreatedDate	Date record was created (Datetimeoffset datatype)	2020-11-03 23:44:00.0000000 +00:00
ModifiedById	Unique identifier of the user that last modified the record	95578
ModifiedDateChar	Date record was last modified (Varchar datatype)	2020-11-03 23:44:00.000000 +00:00
ModifiedDate	Date record was last modified (Datetimeoffset datatype)	2020-11-03 23:44:00.0000000 +00:00

Sample


```
{
        "QuestionReportingTagId": 1,
        "QuestionId": 248574,
        "ReportingTagId": 1,
        "IsActive": true,
        "CreatedById": 17013,
        "CreatedDateChar": "2020-10-24 05:37:48.000000 +00:00",
        "CreatedDate": "2020-10-24T05:37:48Z",
        "ModifiedById": 17013,
        "ModifiedDateChar": "2020-10-24 05:37:48.000000 +00:00",
        "ModifiedDate": "2020-10-24T05:37:48Z"
}
```


Data Validation
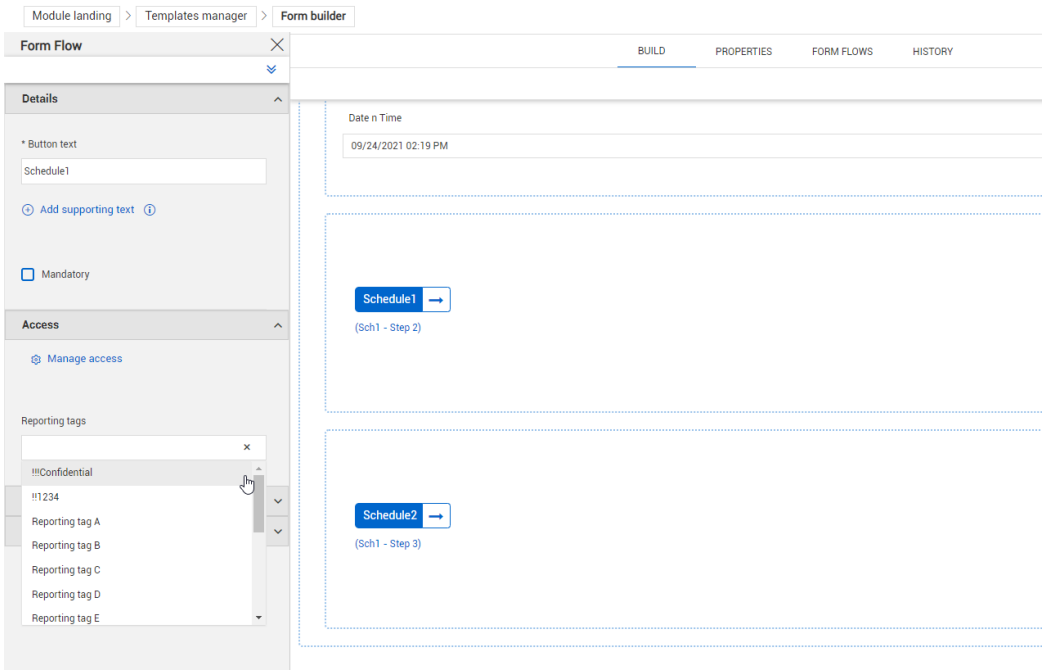
This data can be validated by navigating to Completions, selecting the module the desired template is under, and selecting the desired template in the template manager.