Explore API Documentation

SelfService_Completion_QuestionText

Version 1.0

Last Modified: 22-Oct-2024

Last Modified By: Litzy Mora

© 2024 InEight, Inc. All rights reserved.

Change Log

This changelog only contains significant or notable changes to the revision. Any editorial type changes or minor changes are not included.

Revision	Change Date	Description	Modified By
1.0	22-Oct-2024	Initial release	Litzy Mora

Contents

Change Log....2
Overview....3
Relationships and Dependencies....3
API Detail....3
Supported Filters....3
Fields....4
Field Descriptions....4
Sample....5

Overview

The Question Text API is designed to expose translated question data from Completions forms. **When using this API, please filter by Language ID or Language code to eliminate duplicates.**

Relationships and Dependencies

From: Table	To: Table	Relationship	Cardinality[1]
SelfService_Completion_ QuestionText (QT)	SelfService_Completion_ EventTaskData (ETD)	QT.QuestionId = ETD.InspectQuestionId	M:1
SelfService_Completion_ QuestionText (QT)	SelfService_Completion_ QuestionReportingTag (QRT)	QT.QuestionId = QRT.QuestionId	M:1

API Detail

Direction		From Project Suite
Pagination		50,000 Rows
Frequency		All Reporting APIs are used by calling a GET method at an interval determined by the customer. InEight suggests using these APIs on an infrequent basis (once per day) to avoid potential performance impact to live systems when the returned data set could be large.
Trigger Method(s)		All default OData filters are supported
Average Payload Size		Depends on date range selected
APIM Name		SelfService_Completion_QuestionText
Replicate View		SelfService.vwCompletionsQuestionText
Data Refresh/Delta/Incremental Loads		The data in this API will refresh in twenty minutes or less from the time it is entered.
Project Suite	**Starting Version**	23.2
	Ending Version	N/A

Supported Filters

All default OData filters are supported by this API.

[1] *1:M = One to Many, 1:1 = One to One, M:1 = Many to one*

Fields

Name	DataType	CharMaxLength	NumericPrecision	Scale	IsNullable	PK
QuestionTextId	bigint	8	19	0	N	X
QuestionId	bigint	8	19	0	Y	
QuestionTextName	nvarchar	4000	0	0	Y	
QuestionTextDescription	nvarchar	4000	0	0	Y	
LanguageId	bigint	8	19	0	Y	
LanguageCode	nvarchar	25	0	0	Y	
CreatedById	bigint	8	19	0	Y	
CreatedDate	datetimeoffset	10	34	7	Y	
CreatedDateChar	varchar	35	0	0	Y	
ModifiedById	bigint	8	19	0	Y	
ModifiedDate	datetimeoffset	10	34	7	Y	
ModifiedDateChar	varchar	35	0	0	Y	
IsActive	bit	1	1	0	N	

Field Descriptions

Name	Description	Example
QuestionTextId	Unique identifier for all records in this API	58196
QuestionId	Unique identifier for each question	58200
QuestionTextName	Text of the question as it appears on a form	18.30.9 Clarifications
QuestionTextDescription	Text description for the question	Add additional names, comments, etc.
LanguageId	Unique value indicating the language Id associated to the record	1
LanguageCode	Code indicating the language Id	en
CreatedById	Unique identifier associated to the creator of the record	14
CreatedDate	Indicates the date created	2020-06-12 18:55:00.8472170 +00:00
CreatedDateChar	Indicates the date created	2020-06-12 18:55:00.847217 +00:00
ModifiedById	Indicates the Id of individual that made modification	14
ModifiedDate	Date of the modification	2020-06-12 18:55:00.8472170 +00:00
ModifiedDateChar	Date of the modification	2020-06-12 18:55:00.847217 +00:00

IsActive	Indicates if a record is active or inactive	1

Sample


```
{
    "QuestionTextId": 1,
    "QuestionId": 1,
    "QuestionTextName": "Operation",
    "QuestionTextDescription": "",
    "LanguageId": 1,
    "LanguageCode": "en",
    "CreatedById": 60,
    "CreatedDate": "2019-09-16T16:18:07.5402756Z",
    "CreatedDateChar": "2019-09-16 16:18:07.540276 +00:00",
    "ModifiedById": 60,
    "ModifiedDate": "2019-09-16T16:47:24.2987181Z",
    "ModifiedDateChar": "2019-09-16 16:47:24.298718 +00:00",
    "IsActive": true
}
```


Validation
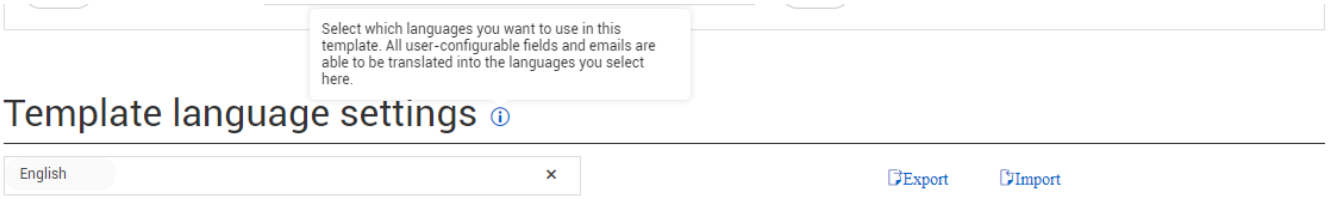
This data can be validated by navigating to the Templates manager, select a template, select the Properties tab and scroll down to the Template language settings section