SelfService_Completion_ReportingTag

Version 1.0

Last Modified: 22-Oct-2024

Last Modified By: Litzy Mora

© 2024 InEight, Inc. All rights reserved.

Change Log

This changelog only contains significant or notable changes to the revision. Any editorial type changes or minor changes are not included.

Revision	Change Date	Description	Modified By
1.0	22-Oct-2024	Initial release	Litzy Mora

Contents

Change Log....2
Overview....3
Relationships and Dependencies....3
API Detail....3
Supported Filters....4
Fields....4
Field Descriptions....4
Sample....5
Data Validation....5

Overview

The Completions Reporting Tag endpoint is intended to provide information about Reporting tags created in Completions. This information can then be joined to other APIs to retrieve information about users that can access information with these tags as well as the tags' translated values.

Relationships and Dependencies

From: Table	To: Table	Relationship	Cardinality[1]
SelfService_Completion_ ReportingTag (RT)	SelfService_Completion_ ReportingTagText (RTT)	RT.ReportingTagId= RTT.ReportingTagId	1:M
SelfService_Completions_ ReportingTag (RT)	SelcService_Completion_UserReportingTagAssignment (RTA)	RT.ReportingTagId= RTA.ReportingTagId AND RT.ModuleId = RTA.ModuleId	1:M
SelfService_Completion_ ReportingTag (RT)	SelfService_Completion_QuestionReportingTag(QRT)	RT.ReportingTagId=QRT.ReportingTagId	1:M

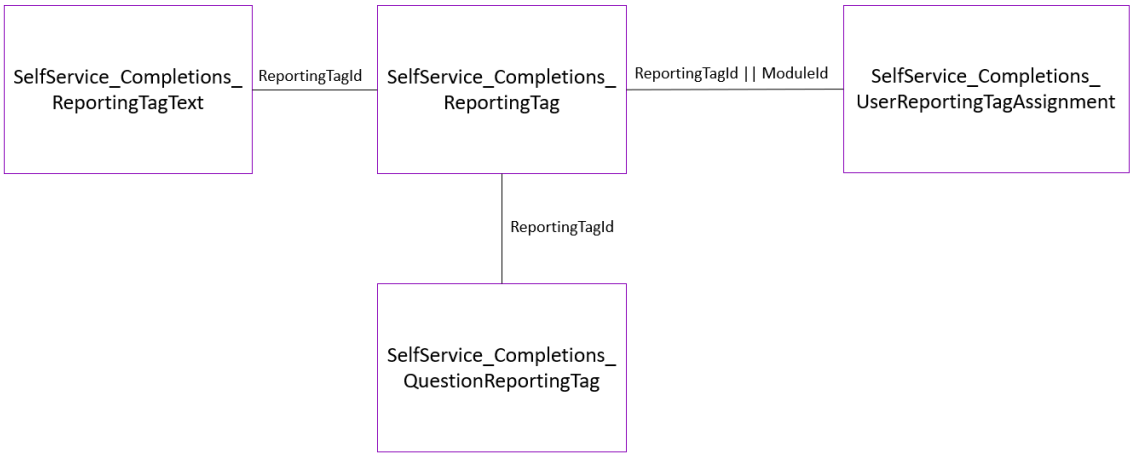

[1] *1:M = One to Many, 1:1 = One to One, M:1 = Many to one*
[2] *With the relationship between ReportingTagUserAssignment and ReportingTag requires the ModuleId and ReportingTagId to connect this can be done by joining on both or concatenating the two columns*

API Detail

Direction	From Project Suite
Pagination	50,000 Rows
Frequency	All Reporting APIs are used by calling a GET method at an interval determined by the customer. InEight suggests using these APIs on an infrequent basis (once per day) to avoid potential performance impact to live systems when the returned data set could be large.
Trigger Method(s)	All default OData filters are supported
Average Payload Size	Depends on date range selected

APIM Name		SelfService_Completion_ReportingTag
Replicate View		[SelfService].[vwCompletionsReportingTag]
Data Refresh/Delta/Incremental Loads		The data in this API will refresh in twenty minutes or less from the time it is entered.
Project Suite	**Starting Version**	23.2
	Ending Version	N/A

Supported Filters

All default OData filters are supported by this API.

Fields

Name	DataType	CharMaxLength	NumericPrecision	Scale	IsNullable	PK
ReportingTagId	bigint	8	19	0	N	X
ModuleId	bigint	8	19	0	Y	
LanguageId	bigint	8	19	0	Y	
LanguageDisplayId	nvarchar	25	0	0	Y	
ReportingTagName	nvarchar	500	0	0	Y	
ReportingTagDescription	nvarchar	4000	0	0	Y	
CreatedById	bigint	8	19	0	Y	
CreatedDateChar	varchar	35	0	0	Y	
CreatedDate	datetimeoffset	10	34	7	Y	
ModifiedById	bigint	8	19	0	Y	
ModifiedDateChar	varchar	35	0	0	Y	
ModifiedDate	datetimeoffset	10	34	7	Y	
IsActive	bit	1	1	0	N	

Field Descriptions

Name	Description	Example
ReportingTagId	Unique identifier assigned to the reporting tag	2
ModuleId	Unique identifier assigned to the module where the reporting tag is assigned	2
LanguageId	Unique identifier associated to the language assigned to the tag	1
LanguageDisplayId	Display value associated to the language assigned to the tag	en
ReportingTagName	Text name of tag	Confidential
ReportingTagDescription	Description assigned to the tag	Confidential information indicator
CreatedById	Unique identifier of the individual that created the record	17013

CreatedDateChar	Date that the record was created (Varchar datatype)	2020-10-24 05:35:29.097098 +00:00
CreatedDate	Date that the record was created (DateTimeOffset datatype)	2020-10-24 05:35:29.0970984 +00:00
ModifiedById	Unique identifier of the user that modified the record	17013
ModifiedDateChar	Date that the record was Modified (Char datatype)	2020-10-24 05:35:29.097098 +00:00
ModifiedDate	Date that the record was Modified (DateTimeOffset datatype)	2020-10-24 05:35:29.0970984 +00:00
IsActive	Indicator if the record is active	1

Sample


```
{
    "ReportingTagId": 2,
    "ModuleId": 2,
    "LanguageId": 1,
    "LanguageDisplayId": "en",
    "ReportingTagName": "Confidential",
    "ReportingTagDescription": "",
    "CreatedById": 17013,
    "CreatedDateChar": "2020-10-24 05:35:29.097098 +00:00",
    "CreatedDate": "2020-10-24T05:35:29.0970984Z",
    "ModifiedById": 17013,
    "ModifiedDateChar": "2020-10-24 05:35:29.097098 +00:00",
    "ModifiedDate": "2020-10-24T05:35:29.0970984Z",
    "IsActive": true
}
```


Data Validation

This data can be validated by navigating to Completions and selecting the desired Module the tags were created under.

Completions> Module> Settings> Reporting Tags

**Must be at the Org level

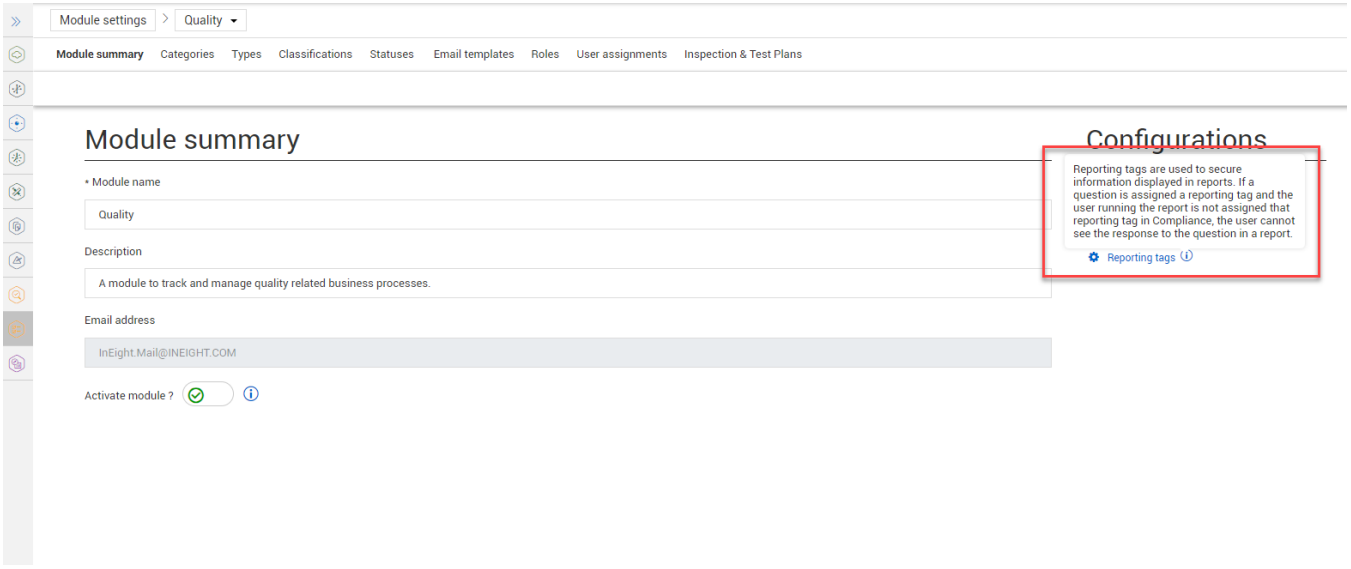
Module settings
Quality
Module summary
Categories
Types
Classifications
Statuses
Email templates
Roles
User assignments
Inspection & Test Plans
Module summary
* Module name
Quality
Description
A module to track and manage quality related business processes.
Email address
InEight.Mail@INEIGHT.COM
Activate module ?
Configurations
Reporting tags are used to secure information displayed in reports. If a question is assigned a reporting tag and the user running the report is not assigned that reporting tag in Compliance, the user cannot see the response to the question in a report.
Reporting tags

Reporting tags
Reporting tag
!!!Confidential
!!1234
Reporting tag A
Reporting tag B
Reporting tag C
Reporting tag D
Reporting tag E
Reporting tag F
Reporting tag G
Reporting tag H
Reporting tag I
Reporting tag J
Reporting tag K
Reporting tag L
16 reporting tags
Cancel
Save