Explore API Documentation

SelfService_Completion_ReportingTagText

Version 1.0

Last Modified: 22-Oct-2024

Last Modified By: Litzy Mora

© 2024 InEight, Inc. All rights reserved.

Change Log

This changelog only contains significant or notable changes to the revision. Any editorial type changes or minor changes are not included.

Revision	Change Date	Description	Modified By
1.0	22-Oct-2024	Initial release	Litzy Mora

Contents

Change Log....2
Overview....3
Relationships and Dependencies....3
API Detail....3
Supported Filters....4
Fields....4
Field Descriptions....4
Sample....5

Overview

The Reporting Tag Text API is designed to expose translated Reporting Tag data created in Completions. **When using this API, please filter by Language ID or Language code to eliminate duplicates.**

Relationships and Dependencies

From: Table	To: Table	Relationship	Cardinality[1]
SelfService_Completion_ ReportingTagText (RTT)	SelfService_Completion_ ReportingTag (RT)	RTT.ReportingTagId= RT.ReportingTagId	M:1

API Detail

Direction		From Project Suite
Pagination		50,000 Rows
Frequency		All Reporting APIs are used by calling a GET method at an interval determined by the customer. InEight suggests using these APIs on an infrequent basis (once per day) to avoid potential performance impact to live systems when the returned data set could be large.
Trigger Method(s)		All default OData filters are supported
Average Payload Size		Depends on date range selected
APIM Name		SelfService_Completion_ReportingTagText
Replicate View		[SelfService].[vwCompletionsReportingTagText]
Data Refresh/Delta/Incremental Loads		The data in this API will refresh in twenty minutes or less from the time it is entered.
Project Suite	**Starting Version**	23.2
	Ending Version	N/A

[1] *1:M = One to Many, 1:1 = One to One, M:1 = Many to one*

Supported Filters

All default OData filters are supported by this API.

Fields

Name	DataType	CharMaxLength	NumericPrecision	Scale	IsNullable	PK
ReportingTagTextId	bigint	8	19	0	N	X
ReportingTagId	bigint	8	19	0	Y	
LanguageId	bigint	8	19	0	Y	
LanguageDisplayId	nvarchar	25	0	0	Y	
ReportingTagTextName	nvarchar	500	0	0	Y	
ReportingTagTextDescription	nvarchar	4000	0	0	Y	
CreatedById	bigint	8	19	0	Y	
CreatedDateChar	varchar	35	0	0	Y	
CreatedDate	datetimeoffset	10	34	7	Y	
ModifiedById	bigint	8	19	0	Y	
ModifiedDate	datetimeoffset	10	34	7	Y	
ModifiedDateChar	varchar	35	0	0	Y	
IsActive	bit	1	1	0	N	

Field Descriptions

Name	Description	Example
ReportingTagTextId	Unique identifier for all records in this API	58196
ReportingTagId	Unique identifier for each Reporting Tag	58200
LanguageId	Unique value indicating the language Id associated to the record	1
LanguageDisplayId	User-facing Id indicating the language Id	en
ReportingTagTextName	Text name of the Reporting Tag	Confidential
ReportingTagTextDescription	Text description of what the Reporting Tag represents	For restricted users only
CreatedById	Id of individual that created the record	2020-06-12 18:55:00.847217 +00:00
CreatedDateChar	Character date record was created	2020-06-12 18:55:00.847217 +00:00
CreatedDate	Date record was created	2020-06-12 18:55:00.8472170 +00:00

ModifiedById	Id of individual that modified the record	25
ModifiedDate	Date of record's modification	2020-06-12 18:55:00.847217 +00:00
ModifiedDateChar	Character date of record's modification	2020-06-12 18:55:00.847217 +00:00
IsActive	Indicates if a record is active or inactive	True

Sample


```
{
        "ReportingTagTextId": 2,
        "ReportingTagId": 2,
        "LanguageId": 1,
        "LanguageDisplayId": "en",
        "ReportingTagTextName": "Confidential",
        "ReportingTagTextDescription": "",
        "CreatedById": 17013,
        "CreatedDateChar": "2020-10-24 05:35:29.097098 +00:00",
        "CreatedDate": "2020-10-24T05:35:29.0970984Z",
        "ModifiedById": 17013,
        "ModifiedDate": "2020-10-24T05:35:29.0970984Z",
        "ModifiedDateChar": "2020-10-24 05:35:29.097098 +00:00",
        "IsActive": true
    }
```


Validation

Reporting Tags can be validated by navigating to the Module settings and selecting the reporting tags link under Configurations.

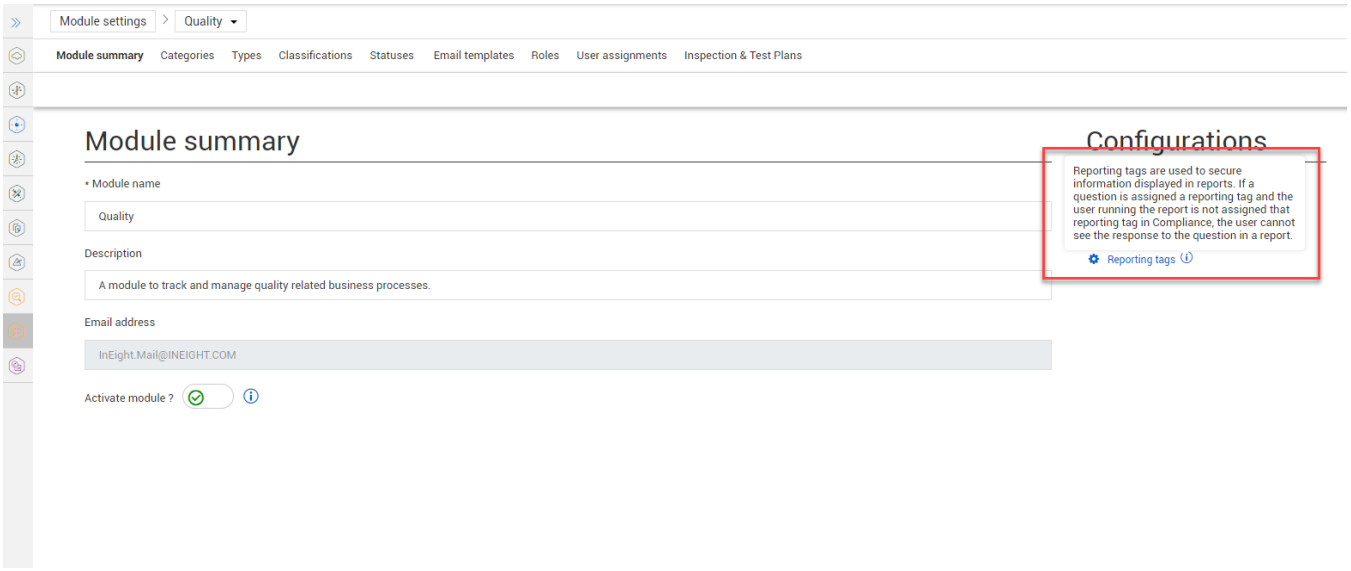
Module settings
Quality
Module summary
Categories
Types
Classifications
Statuses
Email templates
Roles
User assignments
Inspection & Test Plans
Module summary
* Module name
Quality
Description
A module to track and manage quality related business processes.
Email address
InEight.Mail@INEIGHT.COM
Activate module ?
Configurations
Reporting tags are used to secure information displayed in reports. If a question is assigned a reporting tag and the user running the report is not assigned that reporting tag in Compliance, the user cannot see the response to the question in a report.
Reporting tags

Reporting tags
Reporting tag
Confidential
1 reporting tags
Cancel
Save