Explore API Documentation

SelfService_Completions_ActivityTypeText

Version 1.1

Last Modified: 25-Jun-2024

Last Modified By: Natalie Takacs

© 2024 InEight, Inc. All rights reserved.

Change Log

This changelog only contains significant or notable changes to the revision. Any editorial type changes or minor changes are not included.

Revision	Change Date	Description	Modified By
1.0	21-Apr-2023	Initial release	Litzy Mora
1.1	25-Jun-2024	Formatting updates	Natalie Takacs

Contents

Change Log....2
Overview....3
Relationships and Dependencies....3
API Detail....3
Supported Filters....4
Fields....4
Field Descriptions....4
Sample....5
Validation....5

Overview

The Activity Type Text API is designed to expose translated template data from Completions. **When using this API, please filter by Language ID or Language code to eliminate duplicates.**

For more information on template translation, please see the following documentation:

InEight Knowledge Library - Completions Template Translation

Relationships and Dependencies

From: Table	To: Table	Relationship	Cardinality[1]	Comment
SelfService_ Completion_ ActivityTypeText (ATT)	SelfService_Completion_EventTaskData (ETD)	ATT.InspectActivityTypeId= ETD.InspectActivityTypeId	M:1	

API Detail

Direction		From Project Suite
Pagination		5,000 Rows
Frequency		All Reporting APIs are used by calling a GET method at an interval determined by the customer. InEight suggests using these APIs on an infrequent basis (once per day) to avoid potential performance impact to live systems when the returned data set could be large.
Trigger Method(s)		All default OData filters are supported
Average Payload Size		Depends on date range selected
APIM Name		SelfService_Completions_ActivityTypeText
Replicate View		[SelfService].[vwCompletionsActivityTypeText]
Data Refresh/Delta/Incremental Loads		The data in this API will refresh in twenty minutes or less from the time it is entered.
Project Suite	**Starting Version**	23.2
	Ending Version	N/A

[1] *1:M = One to Many, 1:1 = One to One, M:1 = Many to one*

Supported Filters

All default OData filters are supported by this API.

Fields

Name	Type	CharMaxLength	NumericPrecision	DatePrecision	Product	PK
InspectActivityTypeTextId	Bigint	Null	19	Null	Completions	X
InspectActivityTypeId	Bigint	Null	19	Null	Completions	
ActivityTypeName	Nvarchar	250	Null	Null	Completions	
ActivityTypeDescription	Nvarchar	4000	Null	Null	Completions	
LanguageId	Bigint	Null	19	Null	Completions	
LanguageCode	Nvarchar	25	Null	Null	Completions	
CreatedById	Bigint	Null	Null	Null	Completions	
CreatedDateChar	Varchar	35	Null	Null	Completions	
ModifiedById	Bigint	Null	19	Null	Completions	
ModifiedDateChar	Varchar	35	Null	Null	Completions	
IsActive	Bit	Null	Null	Null	Completions	

Field Descriptions

Name	Description	Example
InspectActivityTypeTextId	Unique identifier assigned to each record in the API	1
InspectActivityTypeId	Id assigned to a template	Safety
ActivityTypeName	Text name of the template name	A module to track and manage safety related business processes
ActivityTypeDescription	Text description of the template	True
LanguageId	Unique value indicating the language Id associated to the record	1
LanguageCode	Code indicating the language Id	en
CreatedById	Unique identifier associated to the creator of the record	14
CreatedDateChar	Indicates the date created	2021-03-17 21:56:29.000000 +00:00
ModifiedById	Indicates the Id of individual that made modification	14

ModifiedDateChar	Date of the modification of the record	2021-03-17 21:56:29.000000 +00:00
IsActive	Indicates if a record is active or inactive	1

Sample

{"InspectActivityTypeTextId":1,"InspectActivityTypeId":1,"ActivityTypeName":"Test: Pre-Pour Checklist","ActivityTypeDescription":"Test: Pre-Pour Checklist","LanguageId":1,"LanguageCode":"en","CreatedById":60,"CreatedDateChar":"2019-09-16 16:18:07.540276 +00:00","ModifiedById":60,"ModifiedDateChar":"2019-09-16 16:18:07.540276 +00:00","IsActive":true}

Validation
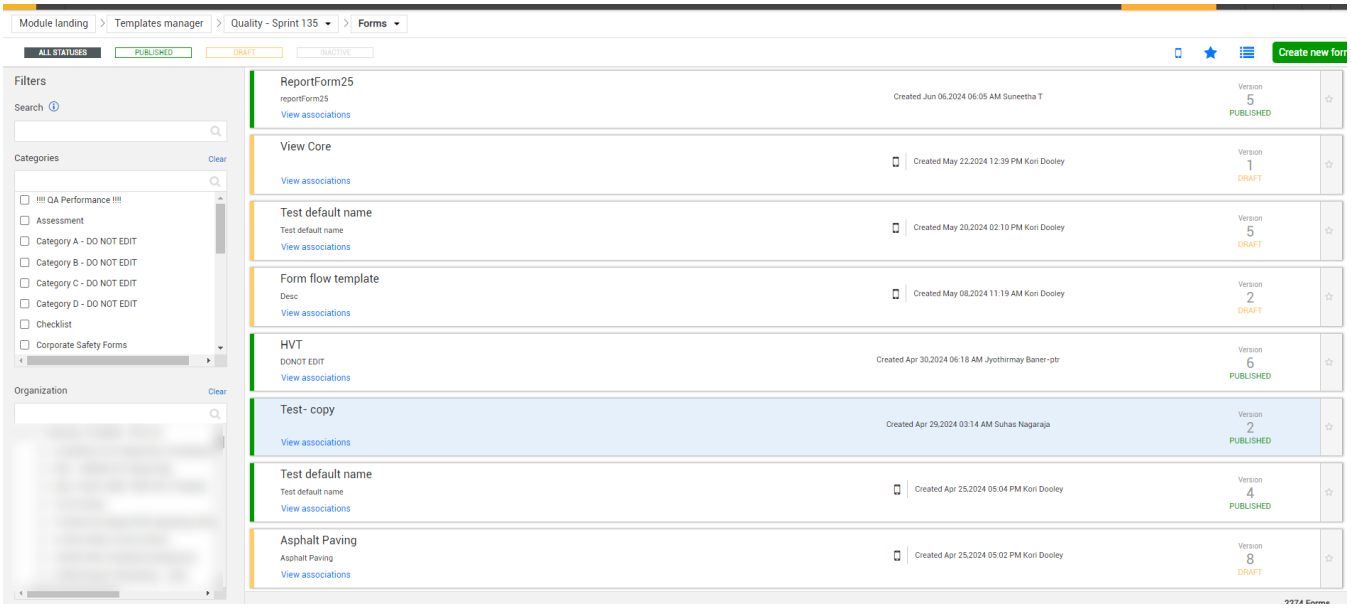
This data can be validated by navigating to a template in the Template manager.