INEIGHT

Explore API Documentation

SelfService_Compliance_ActivityStatusText

Version 1.2

Last Modified: 20-Dec-2022

Last Modified By: Estefany Puc Nieto

© 2024 InEight, Inc. All rights reserved.

Change Log

This changelog only contains significant or notable changes to the revision. Any editorial type changes or minor changes are not included.

Revision	Change Date	Description	Modified By
1.0	22-Jun-2021	Initial release	Jackson Bukata
1.1	10-Aug-2022	Updated data refresh time	Estefany Puc Nieto
1.2	20-Dec-2022	Updated pagination	Litzy Mora

Contents

Change Log....2
Overview....3
Relationships and Dependencies....3
API Detail....3
Supported Filters....3
Fields....4
Field Descriptions....4
Sample....5

Overview

The Activity Status Text API is designed to expose translated status data from Compliance forms. **When using this API, please filter by Language ID or Language code to eliminate duplicates.**

Relationships and Dependencies

From: Table	To: Table	Relationship	Cardinality[1]	Comment
SelfService_ Compliance_ ActivityStatusText (AST)	SelfService_Compliance_GeneralHeaderData (GHD)	AST. InspectActivityStatusId = GHD. InspectActivityStatusId	M:1	

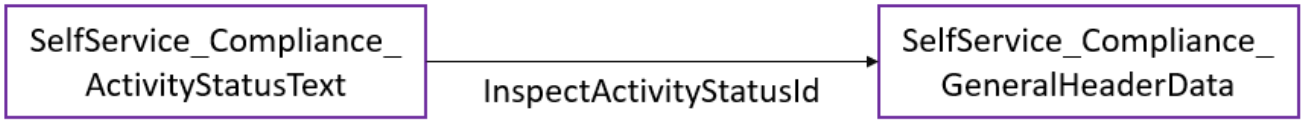

API Detail

Direction		From Project Suite
Pagination		50,000 Rows
Frequency		All Reporting APIs are used by calling a GET method at an interval determined by the customer. InEight suggests using these APIs on an infrequent basis (once per day) to avoid potential performance impact to live systems when the returned data set could be large.
Trigger Method(s)		All default OData filters are supported
Average Payload Size		Depends on date range selected
APIM Name		SelfService_Compliance_ActivityStatusText
Replicate view		SelfService.vwComplianceActivityStatusText
Data Refresh/Delta/Incremental Loads		The data in this API will refresh in twenty minutes or less from the time it is entered.
Project Suite	**Starting Version**	23.2
	Ending Version	N/A

Supported Filters

All default OData filters are supported by this API.

[1] *1:M = One to Many, 1:1 = One to One, M:1 = Many to one*

Fields

Name	DataType	CharMaxLength	NumericPrecision	Scale	IsNullable	PK
InspectActivityStatusTextId	bigint	8	19	0	N	X
LanguageId	bigint	8	19	0	Y	
LanguageCode	nvarchar	25	0	0	Y	
InspectActivityStatusId	bigint	8	19	0	Y	
ActivityStatusName	nvarchar	200	0	0	Y	
ActivityStatusDescription	nvarchar	4000	0	0	Y	
CreatedById	bigint	8	19	0	Y	
CreatedDateChar	varchar	35	0	0	Y	
ModifiedById	bigint	8	19	0	Y	
ModifiedDateChar	varchar	35	0	0	Y	
IsActive	bit	1	1	0	N	

Field Descriptions

Name	Description	Example
InspectActivityStatusTextId	Unique identifier assigned to each record in this API	1
LanguageId	Unique value indicating the language Id associated to the record	1
LanguageCode	Code indicating the language Id	en
InspectActivityStatusId	Unique identifier for each status	5
ActivityStatusName	Text name of the status	Overdue
ActivityStatusDescription	Test description of the status	Form is past the due date and requires immediate action.
CreatedById	Unique identifier associated to the creator of the record	14
CreatedDateChar	Indicates the date created	2021-03-17 21:56:29.000000 +00:00
ModifiedById	Indicates the Id of individual that made modification	14
ModifiedDateChar	Date of the modification	2021-03-17 21:56:29.000000 +00:00
IsActive	Indicates if a record is active or inactive	1

Sample

{
"InspectActivityStatusTextId":1,
"LanguageId":1,
"LanguageCode":"en",
"InspectActivityStatusId":1,
"ActivityStatusName":"Complete",
"ActivityStatusDescription":"Form is done closed, completed and locked. Only admin with appropriate permissions can edit.",
"CreatedById":1,
"CreatedDateChar":"2019-08-17 14:43:32.986818 +00:00",
"ModifiedById":1,"ModifiedDateChar":"2019-08-17 14:43:32.986818 +00:00",
"IsActive":true
}

Validation
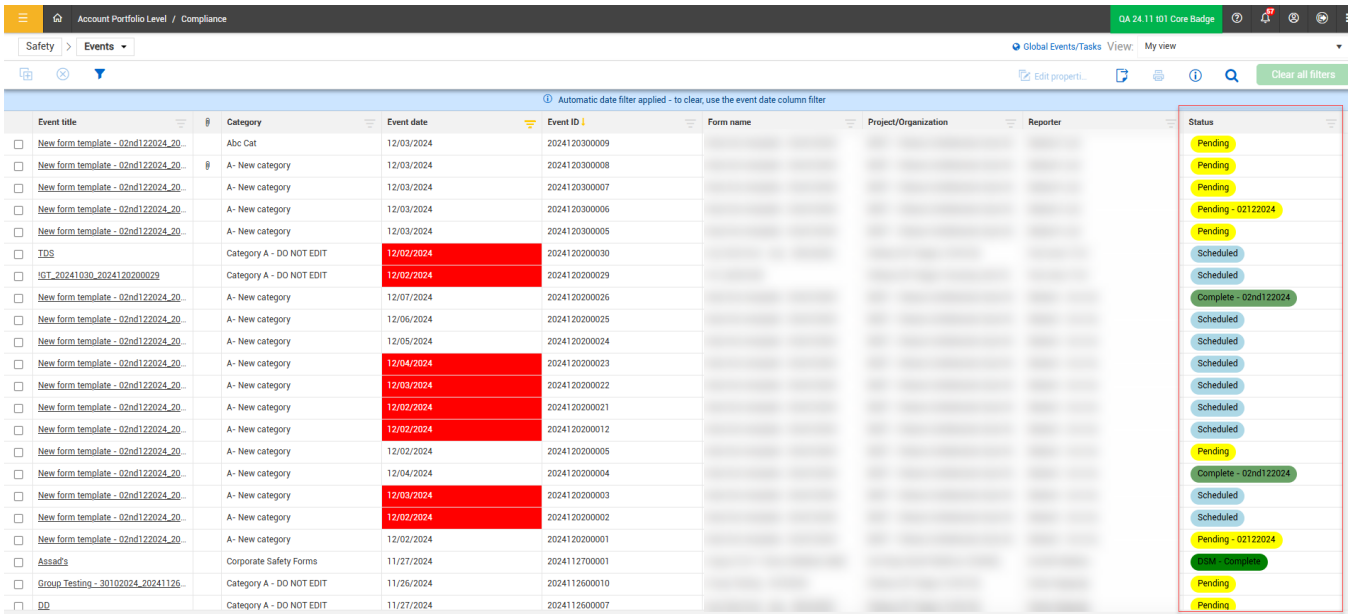
This data can be validated by navigating to Compliance > All events (or tasks) > select an event (or task)