INEIGHT

Explore API Documentation

SelfService_Compliance_ActivityTypeText

Version 1.1

Last Modified: 22-Apr-2024

Last Modified By: Litzy Mora

© 2024 InEight, Inc. All rights reserved.

Change Log

This changelog only contains significant or notable changes to the revision. Any editorial type changes or minor changes are not included.

Revision	Change Date	Description	Modified By
1.0	21-Jun-2021	Initial draft	Jackson Bukata
1.1	10-Aug-2022	Updated data refresh time	Estefany Puc Nieto
1.2	20-Dec-2022	Updated pagination	Litzy Mora

Contents

Change Log....2
Overview....3
Relationships and Dependencies....3
API Detail....3
Supported Filters....3
Fields....4
Field Descriptions....4
Sample....5

Overview

The Activity Type Text API is designed to expose translated template data from Compliance. **When using this API, please filter by Language ID or Language code to eliminate duplicates.**

Relationships and Dependencies

From: Table	To: Table	Relationship	Cardinality[1]	Comment
SelfService_ Compliance_ ActivityTypeText (ATT)	SelfService_Compliance_EventTaskData (ETD)	ATT.InspectActivityTypeId= ETD.InspectActivityTypeId	M:1	

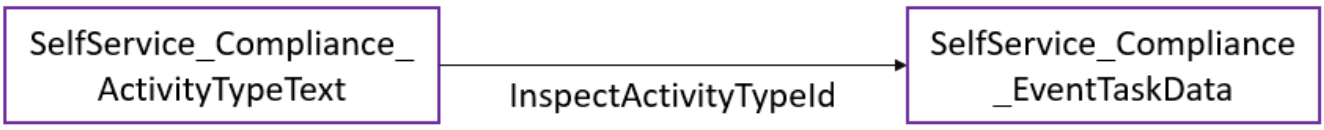

API Detail

Direction		From Project Suite
Pagination		50,000 Rows
Frequency		All Reporting APIs are used by calling a GET method at an interval determined by the customer. InEight suggests using these APIs on an infrequent basis (once per day) to avoid potential performance impact to live systems when the returned data set could be large.
Trigger Method(s)		All default OData filters are supported
Average Payload Size		Depends on date range selected
APIM Name		SelfService_Compliance_ActivityTypeText
Replicate View		SelfService.vwComplianceActivityTypeText
Data Refresh/Delta/Incremental Loads		The data in this API will refresh in twenty minutes or less from the time it is entered.
Project Suite	**Starting Version**	23.2
	Ending Version	N/A

Supported Filters

All default OData filters are supported by this API.

[1] *1:M = One to Many, 1:1 = One to One, M:1 = Many to one*

Fields

Name	Type	CharMaxLength	NumericPrecision	DatePrecision	Product	PK
InspectActivityTypeTextId	Bigint	Null	19	Null	Compliance	X
InspectActivityTypeId	Bigint	Null	19	Null	Compliance	
ActivityTypeName	Nvarchar	250	Null	Null	Compliance	
ActivityTypeDescription	Nvarchar	4000	Null	Null	Compliance	
LanguageId	Bigint	Null	19	Null	Compliance	
LanguageCode	Nvarchar	25	Null	Null	Compliance	
CreatedById	Bigint	Null	Null	Null	Compliance	
CreatedDateChar	Varchar	35	Null	Null	Compliance	
ModifiedById	Bigint	Null	19	Null	Compliance	
ModifiedDateChar	Varchar	35	Null	Null	Compliance	
IsActive	Bit	Null	Null	Null	Compliance	

Field Descriptions

Name	Description	Example
InspectActivityTypeTextId	Unique identifier assigned to each record in the API	1
InspectActivityTypeId	Id assigned to a template	Safety
ActivityTypeName	Text name of the template name	A module to track and manage safety related business processes
ActivityTypeDescription	Text description of the template	True
LanguageId	Unique value indicating the language Id associated to the record	1
LanguageCode	Code indicating the language Id	en
CreatedById	Unique identifier associated to the creator of the record	14
CreatedDateChar	Indicates the date created	2021-03-17 21:56:29.000000 +00:00
ModifiedById	Indicates the Id of individual that made modification	14
ModifiedDateChar	Date of the modification of the record	2021-03-17 21:56:29.000000 +00:00
IsActive	Indicates if a record is active or inactive	True

Sample

{
"InspectActivityTypeTextId":1,
"InspectActivityTypeId":1,
"ActivityTypeName":"Test: Pre-Pour Checklist",
"ActivityTypeDescription":"Test: Pre-Pour Checklist",
"LanguageId":1,"LanguageCode":"en",
"CreatedById":60,"CreatedDateChar":"2019-09-16 16:18:07.540276 +00:00",
"ModifiedById":60,
"ModifiedDateChar":"2019-09-16 16:18:07.540276 +00:00",
"IsActive":true
}

Sample
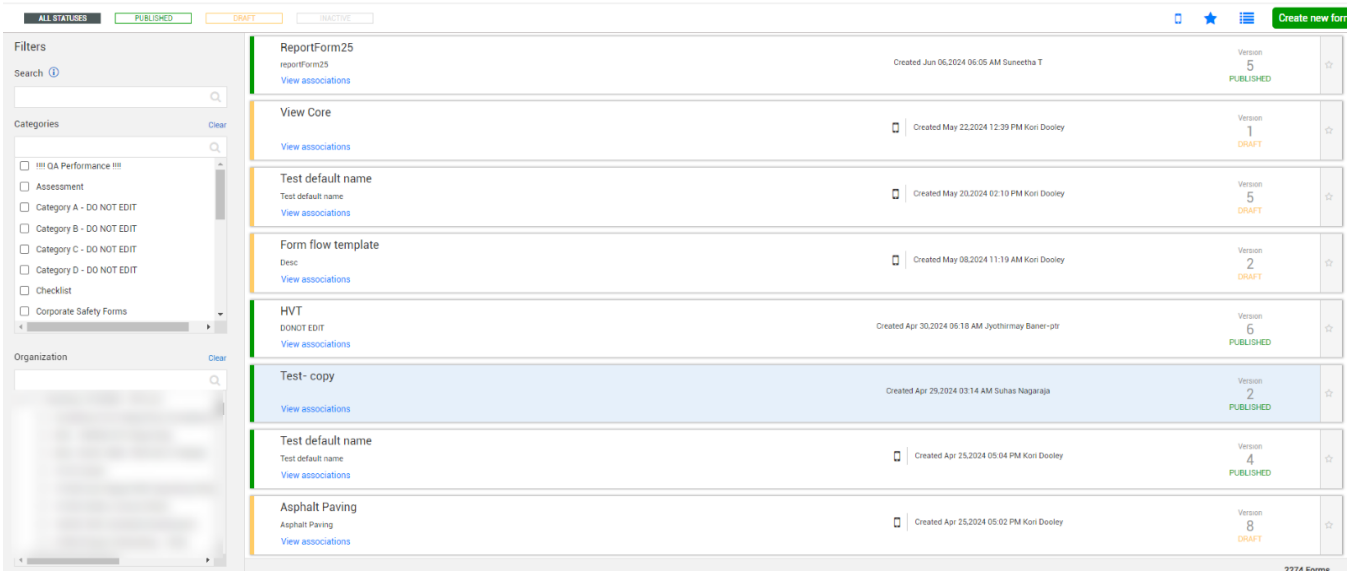
This data can be validated by navigating to a template in the Template manager.