



## Explore API Documentation

# SelfService\_Compliance\_CategoryData

Version 1.2

Last Modified: 11/14/2023

Last Modified By: Estefany Puc Nieto



## Change Log

This changelog only contains significant or notable changes to the revision. Any editorial type changes or minor changes are not included.

Revision	Change Date	Description	Modified By
1.0	12/17/2019	Initial draft	Natalie Takacs
1.1	9/20/2021	Updated API call information in "Sample" section	Natalie Takacs
1.2	8/10/2022	Updated data refresh time	Estefany Puc Nieto

## Contents


Change Log.....	2
Overview.....	3
Relationships and Dependencies.....	3
API Detail.....	3
Supported Filters.....	3
Fields.....	4
Field Descriptions.....	4
Sample.....	4

## Overview

The Compliance Category API is intended to give users data about Compliance Categories that they can then connect to form, question, and module information utilizing the other Compliance APIs.

## Relationships and Dependencies

From: Table	To: Table	Relationship	Cardinality <sup>1</sup>	Comment
SelfService_Compliance_CategoryData (CD)	SelfService_Compliance_GeneralHeaderData (GHD)	CD. InspectCategoryId = GHD. InspectCategoryId	1:M	
SelfService_Compliance_CategoryData (CD)	SelfService_Compliance_ModuleData (MD)	CD. InspectModuleId = MD. InspectModuleId	M:1	

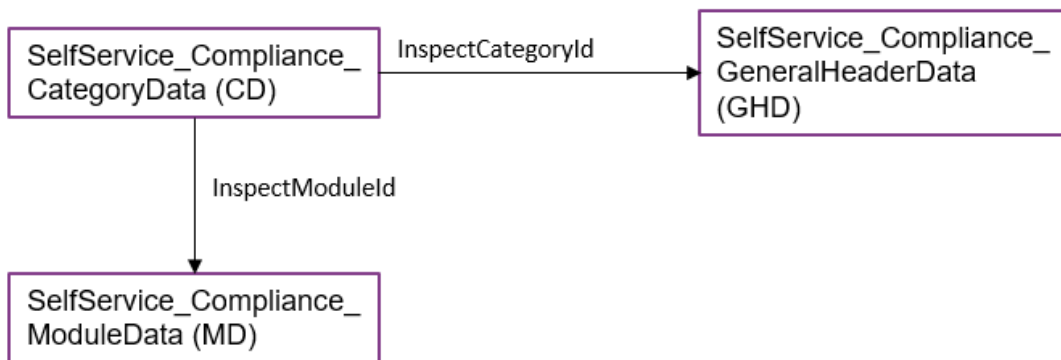

## API Detail

Direction	From Project Suite	
Pagination	50,000 Rows	
Frequency	All Reporting APIs are used by calling a GET method at an interval determined by the customer. InEight suggests using these APIs on an infrequent basis (once per day) to avoid potential performance impact to live systems when the returned data set could be large.	
Trigger Method(s)	All default OData filters are supported	
Average Payload Size	Depends on date range selected	
APIM Name	SelfService_Compliance_CategoryData	
Data Refresh/Delta/Incremental Loads	The data in this API will refresh in five minutes or less from the time it is entered.	
Project Suite	Starting Version	V1.0
	Ending Version	V1.1

## Supported Filters

All default OData filters are supported by this API.

<sup>1</sup> 1:M = One to Many, 1:1 = One to One, M:1 = Many to one

## Fields

Name	Type	CharMaxLengt h	NumericPrecisio n	DatePrecisio n	Product	P K
<b>InspectCategoryId</b>	Bigint	Null	19	Null	Compliance	X
<b>LanguageId</b>	Bigint	Null	19	Null	Compliance	
<b>InspectModuleId</b>	Bigint	Null	19	Null	Compliance	
<b>Category</b>	Nvarchar	200	Null	Null	Compliance	
<b>Description</b>	Nvarchar	4000	Null	Null	Compliance	
<b>CreatedDate</b>	Datetimeoffset	Null	Null	7	Compliance	
<b>ModifiedDate</b>	Datetimeoffset	Null	Null	7	Compliance	
<b>IsActive</b>	Bit	Null	Null	Null	Compliance	

## Field Descriptions

Name	Description	Example
<b>InspectCategoryId</b>	Unique identifier that corresponds to each category	1
<b>LanguageId</b>	Identifier that ties each category to a language	1
<b>InspectModuleId</b>	Identifier of which module the record is associated to	1
<b>Category</b>	Text name of the category in Compliance	Injury incidents
<b>Description</b>	Text description of the category in Compliance	Incidents resulting in injuries
<b>CreatedDate</b>	Date the category record was created	2019-01-10 11:26:41.2433 333 +00:00
<b>ModifiedDate</b>	Date the record was modified	2019-01-10 11:26:41.2433 333 +00:00
<b>IsActive</b>	Indicator of whether the record is still active	True

## Sample

```
{
  https://[TenantKey].ineight.com/reportwebservices/odata/SelfService_Compliance_CategoryData
}
```

```
{"InspectCategoryId":1,"LanguageId":1,"InspectModuleId":4,"Category":"Field  
Forms","LanguageName":"English","Description":"","CreatedDate":"2019-09-  
16T13:41:49.2814681Z","CreatedDateChar":"2019-09-16 13:41:49.281468  
+00:00","ModifiedDate":"2019-09-16T13:41:49.2814681Z","ModifiedDateChar":"2019-09-  
16 13:41:49.281468 +00:00","IsActive":true}
```