INEIGHT

Explore API Documentation

SelfService_Compliance_ModuleData

Version 1.2

Last Modified: 10-Aug-2022

Last Modified By: Estefany Puc Nieto

© 2024 InEight, Inc. All rights reserved.

Change Log

This changelog only contains significant or notable changes to the revision. Any editorial type changes or minor changes are not included.

Revision	Change Date	Description	Modified By
1.0	17-Dec-2019	Initial draft	Natalie Takacs
1.1	20-Sep-2021	Updated API call info in “Sample” section	Natalie Takacs
1.2	10-Aug-2022	Updated data refresh time	Estefany Puc Nieto

Contents

Change Log....2
Overview....3
Relationships and Dependencies....3
API Detail....3
Supported Filters....4
Fields....4
Field Descriptions....4
Sample....4

Overview

The Compliance Module API contains information about an organization's modules within Compliance.

Relationships and Dependencies

From: Table	To: Table	Relationship	Cardinality[1]	Comment
SelfService_ Compliance_ ModuleData (MD)	SelfService_Compliance_CategoryData (CD)	MD.InspectModuleId= CD.InspectModuleId	1:M	DailyPlanId
SelfService_ Compliance_ ModuleData (MD)	SelfService_Compliance_GeneralHeaderData (GHD)	GHD.InspectModuleId= CD.InspectModuleId	1:M	

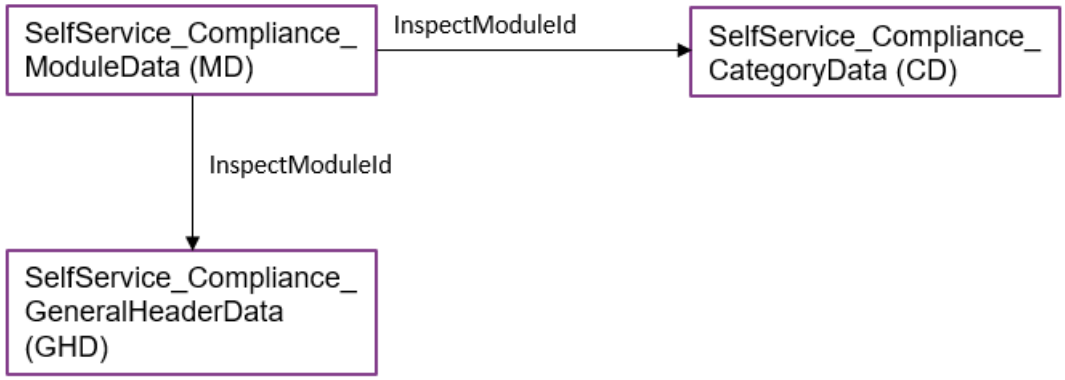

API Detail

Direction		From Project Suite
Pagination		50,000 Rows
Frequency		All Reporting APIs are used by calling a GET method at an interval determined by the customer. InEight suggests using these APIs on an infrequent basis (once per day) to avoid potential performance impact to live systems when the returned data set could be large.
Trigger Method(s)		All default OData filters are supported
Average Payload Size		Depends on date range selected
APIM Name		SelfService_Compliance_ModuleData
Replicate View		[SelfService].[vwComplianceModuleData]
Data Refresh/Delta/Incremental Loads		The data in this API will refresh in twenty minutes or less from the time it is entered.
Project Suite	**Starting Version**	23.2
	Ending Version	N/A

[1] *1:M = One to Many, 1:1 = One to One, M:1 = Many to one*

Supported Filters

All default OData filters are supported by this API.

Fields

Name	Type	CharMaxLength	NumericPrecision	DatePrecision	Product	PK
InspectModuleId	Bigint	Null	19	Null	Compliance	X
Module	Nvarchar	200	Null	Null	Compliance	
Description	Nvarchar	4000	Null	Null	Compliance	
IsTask	Bit	Null	Null	Null	Compliance	
LanguageId	Bigint	Null	19	Null	Compliance	
CreatedDate	Datetimeoffset	Null	Null	7	Compliance	
ModifiedDate	datetimeoffset	Null	Null	7	Compliance	
IsActive	Bit	Null	Null	Null	Compliance	

Field Descriptions

Name	Description	Example
InspectModuleId	Unique identifier assigned to each module in Compliance	1
Module	Text name of the module in Compliance	Safety
Description	Text description of what each module captures	A module to track and manage safety related business processes
IsTask	Indicates if there are tasks in the module	True
LanguageId	Unique value indicating the language Id associated to the record	1
CreatedDate	Date of the creation of the record	2019-01-10 11:26:41.2433 333 +00:00
ModifiedDate	Text name of the form	2019-01-10 11:26:41.2433 333 +00:00
IsActive	Indicates if a record is active or inactive	True

Sample


```
{
"InspectModuleId":1,
"Module":"SAFETY",
```

```
"Description":"A module to track and manage safety related business processes",
"IsTask":true,
"LanguageId":1,
"CreatedDate":"2019-08-17T14:43:32.2680694Z",
"CreatedDateChar":"2019-08-17 14:43:32.268069 +00:00",
"ModifiedDate":"2021-08-31T11:19:51.5892593Z",
"ModifiedDateChar":"2021-08-31 11:19:51.589259 +00:00",
"IsActive":true
}
```


Validation
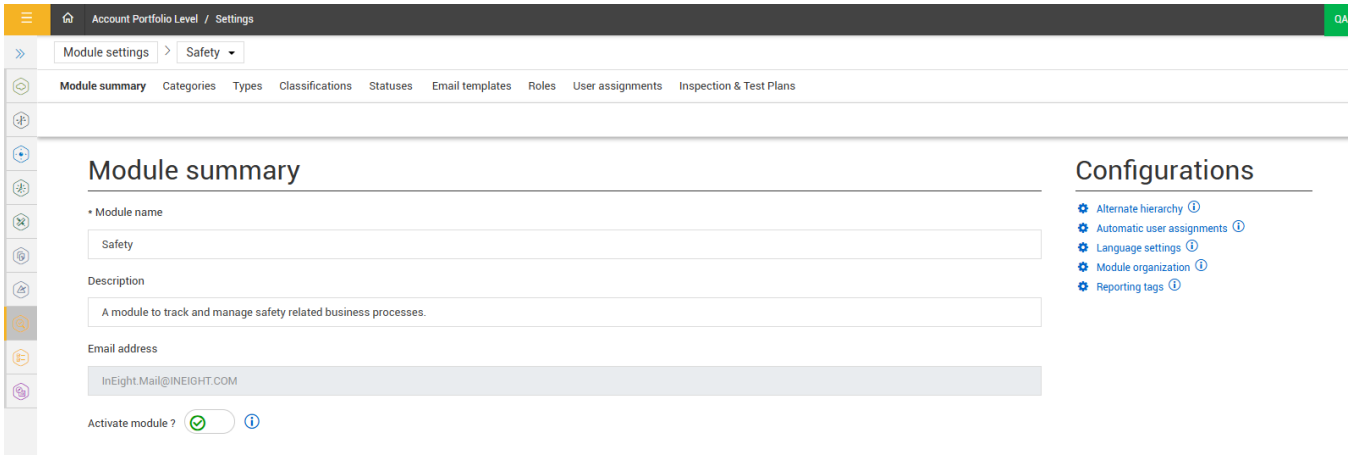
This Data can be validated by navigating to the Module Settings page