

SelfService_Compliance_ReportingTag

Version 1.1

Last Modified: 11/14/2023

Last Modified By: Estefany Puc Nieto



Change Log

This changelog only contains significant or notable changes to the revision. Any editorial type changes or minor changes are not included.

Revision	Change Date	Description	Modified By
1.0	9/23/2021	Initial draft	Natalie Takacs
1.1	8/10/2022	Updated data refresh time	Estefany Puc Nieto

Contents

Change Log.....	2
Overview.....	3
Relationships and Dependencies.....	3
API Detail.....	3
Supported Filters.....	3
Fields.....	4
Field Descriptions.....	4
Sample.....	5
Data Validation.....	5

Overview

The Compliance Reporting Tag endpoint is intended to provide information about Reporting tags created in Compliance. This information can then be joined to other APIs to retrieve information about users that can access information with these tags as well as the tags' translated values.

Relationships and Dependencies

From: Table	To: Table	Relationship	Cardinality ¹
SelfService_Compliance_ReportingTag (RT)	SelfService_Compliance_ReportingTagText (RTT)	RT.ReportingTagId= RTT.ReportingTagId	1:M
SelfService_Compliance_ReportingTag (RT)	SelfService_Compliance_UserReportingTagAssignment (RTA)	RT.ReportingTagId= RTA.ReportingTagId AND RT.ModuleId = RTA.ModuleId	1:M



¹ 1:M = One to Many, 1:1 = One to One, M:1 = Many to one

² With the relationship between ReportingTagUserAssignment and ReportingTag requires the ModuleId and ReportingTagId to connect this can be done by joining on both or concatenating the two columns

API Detail

Direction	From Project Suite	
Pagination	50,000 Rows	
Frequency	All Reporting APIs are used by calling a GET method at an interval determined by the customer. InEight suggests using these APIs on an infrequent basis (once per day) to avoid potential performance impact to live systems when the returned data set could be large.	
Trigger Method(s)	All default OData filters are supported	
Average Payload Size	Depends on date range selected	
APIM Name	SelfService_Compliance_ReportingTag	
Data Refresh/Delta/Incremental Loads	The data in this API will refresh in five minutes or less from the time it is entered.	
Project Suite	Starting Version	21.5
	Ending Version	N/A

Supported Filters

All default OData filters are supported by this API.

Fields

Name	Type	CharMaxLength	NumericPrecision	DatePrecision	Product	PK
ReportingTagId	bigint	8	19	0	Compliance	X
ModuleId	bigint	8	19	0	Compliance	
LanguageId	bigint	8	19	0	Compliance	
LanguageDisplayId	nvarchar	50	0	0	Compliance	
ReportingTagName	nvarchar	1000	0	0	Compliance	
ReportingTagDescription	nvarchar	8000	0	0	Compliance	
CreatedById	bigint	8	19	0	Compliance	
CreatedDateChar	varchar	35	0	0	Compliance	
CreatedDate	datetimeoffset	10	34	7	Compliance	
ModifiedById	bigint	8	19	0	Compliance	
ModifiedDateChar	varchar	35	0	0	Compliance	
ModifiedDate	datetimeoffset	10	34	7	Compliance	
IsActive	bit	1	1	0	Compliance	

Field Descriptions

Name	Description	Example
ReportingTagId	Unique identifier assigned to the reporting tag	3
ModuleId	Unique identifier assigned to the module where the reporting tag is assigned	1
LanguageId	Unique identifier associated to the language assigned to the tag	1
LanguageDisplayId	Display value associated to the language assigned to the tag	EN
ReportingTagName	Text name of tag	Confidential
ReportingTagDescription	Description assigned to the tag	Confidential information indicator
CreatedById	Unique identifier of the individual that created the record	15966
CreatedDateChar	Date that the record was created (Varchar datatype)	2020-11-13 14:39:47.801575 +00:00 15966
CreatedDate	Date that the record was created (DateTimeOffset datatype)	2020-11-13 14:39:47.8015747 +00:00

ModifiedById	Unique identifier of the user that modified the record	15966
ModifiedDateChar	Date that the record was Modified (Char datatype)	2021-01-01 18:34:35.639183 +00:00
ModifiedDate	Date that the record was Modified (DateTimeOffset datatype)	2021-01-01 18:34:35.6391829 +00:00
IsActive	Indicator if the record is active	0=False 1=True

Sample

https://[TenantKey].hds.ineight.com/reportwebservice/odata/SelfService_Compliance_ReportingTag

```
{ "ReportingTagId":1, "ModuleId":4, "LanguageId":1, "LanguageDisplayId":"en", "ReportingTagName":"Confidential", "ReportingTagDescription":"","SourceSystemName":null, "SourceSystemId":null, "CreatedById":17013, "CreatedDateChar":"2020-10-24 05:35:15.583612 +00:00", "CreatedDate":"2020-10-24T05:35:15.5836118Z", "ModifiedById":17013, "ModifiedDateChar":"2020-10-24 05:35:15.583612 +00:00", "ModifiedDate":"2020-10-24T05:35:15.5836118Z", "IsActive":true}
```

Data Validation

This data can be validated by navigating to Compliance and selecting the desired Module the tags were created under.

Figure 1: Compliance > Module > Settings


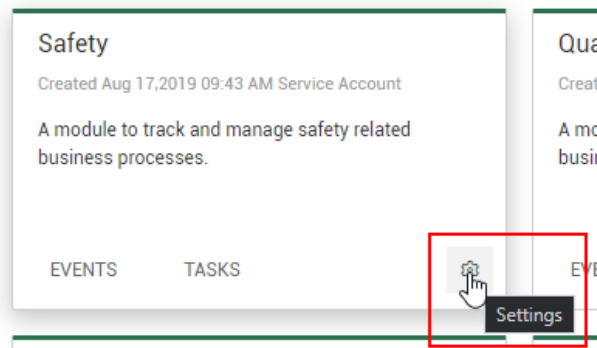


Figure 2: Compliance > Module > Settings > Reporting Tags

**Must be at the Org level

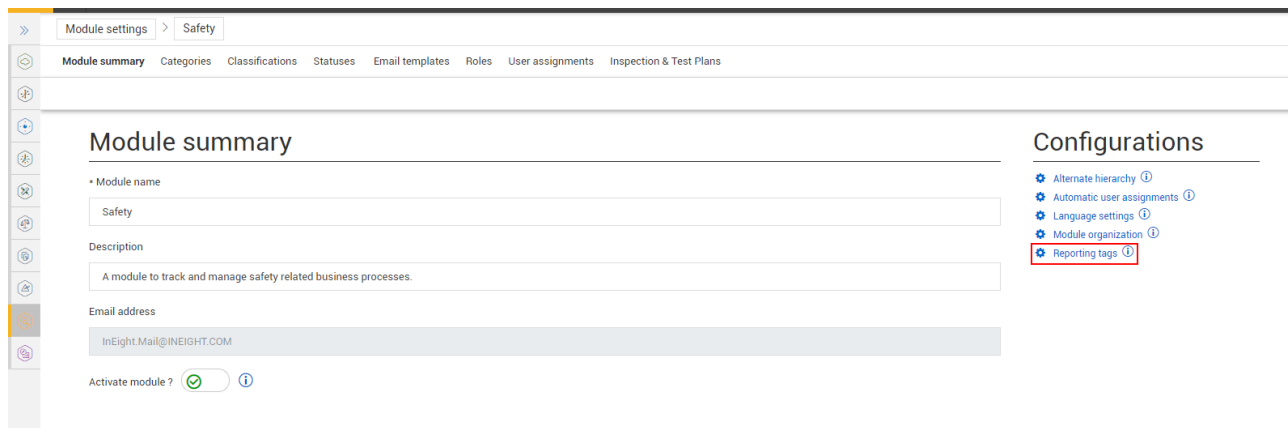

Reporting tags ×

+ ×  ▼

<input type="checkbox"/> Reporting tag
<input type="checkbox"/> !!!Confidential
<input type="checkbox"/> !!1234
<input type="checkbox"/> Reporting tag A
<input type="checkbox"/> Reporting tag B
<input type="checkbox"/> Reporting tag C
<input type="checkbox"/> Reporting tag D
<input type="checkbox"/> Reporting tag E
<input type="checkbox"/> Reporting tag F
<input type="checkbox"/> Reporting tag G
<input type="checkbox"/> Reporting tag H
<input type="checkbox"/> Reporting tag I
<input type="checkbox"/> Reporting tag J
<input type="checkbox"/> Reporting tag K
<input type="checkbox"/> Reporting tag L

16 reporting tags