



Explore API Documentation

SelfService_Compliance_ReportingTagText

Version 1.1

Last Modified: 11/14/2023

Last Modified By: Estefany Puc Nieto



Change Log

This changelog only contains significant or notable changes to the revision. Any editorial type changes or minor changes are not included.

Revision	Change Date	Description	Modified By
1.0	07/14/2021	Initial draft	Natalie Takacs
1.1	8/10/2022	Updated data refresh time	Estefany Puc Nieto

Contents


Change Log.....	2
Overview.....	3
Relationships and Dependencies.....	3
API Detail.....	3
Supported Filters.....	3
Fields.....	4
Field Descriptions.....	4
Sample.....	5

Overview

The Reporting Tag Text API is designed to expose translated Reporting Tag data created in Compliance. **When using this API, please filter by Language ID or Language code to eliminate duplicates.**

Relationships and Dependencies

From: Table	To: Table	Relationship	Cardinality ¹
SelfService_Compliance_ReportingTagText (RTT)	SelfService_Compliance_ReportingTag (RT)	RTT.ReportingTagId=RT.ReportingTagId	M:1

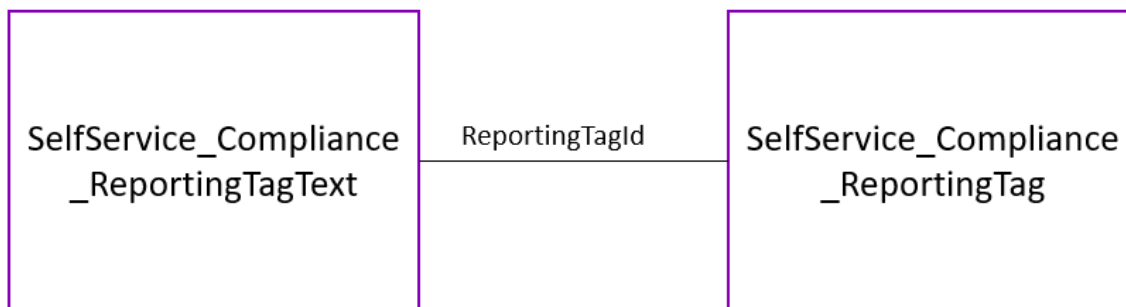

API Detail

Direction	From Project Suite	
Pagination	50,000 Rows	
Frequency	All Reporting APIs are used by calling a GET method at an interval determined by the customer. InEight suggests using these APIs on an infrequent basis (once per day) to avoid potential performance impact to live systems when the returned data set could be large.	
Trigger Method(s)	All default OData filters are supported	
Average Payload Size	Depends on date range selected	
APIM Name	SelfService_Compliance_ReportingTagText	
Data Refresh/Delta/Incremental Loads	The data in this API will refresh in five minutes or less from the time it is entered.	
Project Suite	Starting Version	V1.0
	Ending Version	V1.0

Supported Filters

All default OData filters are supported by this API.

¹ 1:M = One to Many, 1:1 = One to One, M:1 = Many to one

Fields

Name	Type	CharMaxLen gth	NumericPrecis ion	DatePrecisi on	Product	P K
ReportingTagTextId	Bigint	Null	19	Null	Compliance	X
ReportingTagId	Bigint	Null	19	Null	Compliance	
LanguageId	Bigint	Null	19	Null	Compliance	
LanguageDisplayId	Nvarchar	25	Null	Null	Compliance	
ReportingTagTextName	Nvarchar	500	Null	Null	Compliance	
ReportingTagTextDescription	Nvarchar	4000	Null	Null	Compliance	
SourceSystemName	Nvarchar	50	Null	Null	Compliance	
SourceSystemId	Nvarchar	50	Null	Null	Compliance	
CreatedById	Bigint	Null	19	Null	Compliance	
CreatedDateChar	Varchar	35	Null	Null	Compliance	
CreatedDate	Datetimeoffset	7	Null	Null	Compliance	
ModifiedById	Bigint	Null	19	Null	Compliance	
ModifiedDate	Datetimeoffset	7	Null	Null	Compliance	
ModifiedDateChar	Varchar	35	Null	Null	Compliance	
IsActive	Bit	Null	Null	Null	Compliance	

Field Descriptions

Name	Description	Example
ReportingTagTextId	Unique identifier for all records in this API	58196
ReportingTagId	Unique identifier for each Reporting Tag	58200
LanguageId	Unique value indicating the language Id associated to the record	1
LanguageDisplayId	User-facing Id indicating the language Id	en
ReportingTagTextName	Text name of the Reporting Tag	Confidential
ReportingTagTextDescription	Text description of what the Reporting Tag represents	For restricted users only
SourceSystemName	Name of system Reporting Tag was sourced from	System

SourceSystemId	Name of system Reporting Tag was sourced from	1
CreatedById	Id of individual that created the record	2020-06-12 18:55:00.847217+00:00
CreatedDateChar	Character date record was created	2020-06-12 18:55:00.847217+00:00
CreatedDate	Date record was created	2020-06-12 18:55:00.8472170+00:00
ModifiedById	Id of individual that modified the record	25
ModifiedDate	Date of record's modification	2020-06-12 18:55:00.847217+00:00
ModifiedDateChar	Character date of record's modification	2020-06-12 18:55:00.847217+00:00
IsActive	Indicates if a record is active or inactive	1/True

Sample

[https://\[TenantKey\].hds.ineight.com/reportwebservices/odata/SelfService_Compliance_ReportingTagText](https://[TenantKey].hds.ineight.com/reportwebservices/odata/SelfService_Compliance_ReportingTagText)

```
{
  "ResponseTypeElementTextId":1,"ResponseTypeElementId":1,"ResponseTypeElementTextName":"Trucking
  DBE","ResponseTypeElementTextDescription":"","LanguageId":1,"LanguageCode":"en","CreatedBy":59,"CreatedDate":"2
  019-07-24T19:28:55.5350882Z","CreatedDateChar":"2019-07-24 19:28:55.535088
  +00:00","ModifiedBy":59,"ModifiedDate":"2019-07-24T19:28:55.5350882Z","ModifiedDateChar":"2019-07-24
  19:28:55.535088 +00:00","IsActive":true}
}
```