Explore API Documentation

SelfService_Compliance_ResponseTypeElementText

Version 1.1

Last Modified: 22-Dec-2022

Last Modified By: Litzy Mora

© 2024 InEight, Inc. All rights reserved.

Change Log

This changelog only contains significant or notable changes to the revision. Any editorial type changes or minor changes are not included.

Revision	Change Date	Description	Modified By
1.0	14-Jul-2021	Initial draft	Natalie Takacs
1.1	10-Aug-2022	Updated data refresh time	Estefany Puc Nieto
1.2	22-Dec-2022	Updated pagination	Litzy Mora

Contents

Change Log....2
Overview....3
Relationships and Dependencies....3
API Detail....3
Supported Filters....3
Fields....4
Field Descriptions....4
Sample....5

Overview

The Response Type Element Text API is designed to expose translated response data from Compliance forms. **When using this API, please filter by Language ID or Language code to eliminate duplicates.**

Relationships and Dependencies

From: Table	To: Table	Relationship	Cardinality[1]
SelfService_Compliance_ ResponseTypeElementText (RT)	SelfService_Compliance_ EventTaskData (ETD)	QT.ResponseTypeElementId= ETD.ResponseTypeElementId	M:1

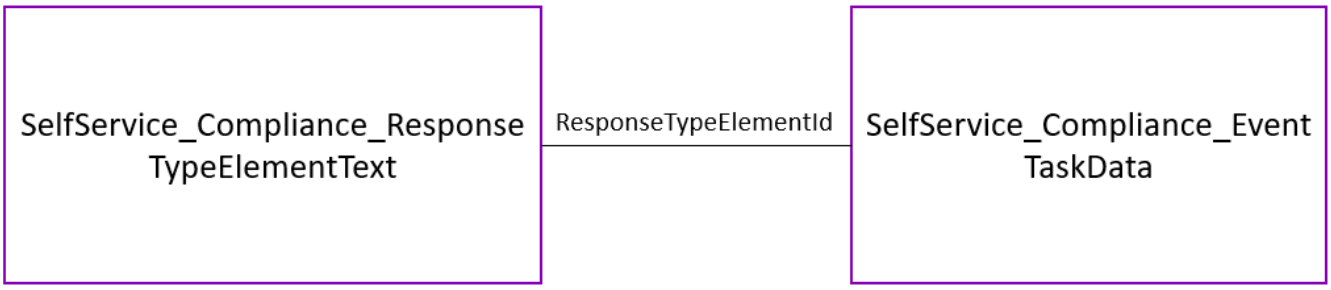

API Detail

Direction		From Project Suite
Pagination		50,000 Rows
Frequency		All Reporting APIs are used by calling a GET method at an interval determined by the customer. InEight suggests using these APIs on an infrequent basis (once per day) to avoid potential performance impact to live systems when the returned data set could be large.
Trigger Method(s)		All default OData filters are supported
Average Payload Size		Depends on date range selected
APIM Name		SelfService_Compliance_ResponseTypeElementText
Replicate View		[SelfService].[vwComplianceResponseTypeElementText]
Data Refresh/Delta/Incremental Loads		The data in this API will refresh in twenty minutes or less from the time it is entered.
Project Suite	**Starting Version**	23.2
	Ending Version	N/A

Supported Filters

All default OData filters are supported by this API.

[1] *1:M = One to Many, 1:1 = One to One, M:1 = Many to one*

Fields

Name	Type	CharMaxLength	NumericPrecision	DatePrecision	Product	PK
ResponseTypeElementTextId	Bigint	Not Null	19	Null	Compliance	X
ResponseTypeElementId	Bigint	Null	19	Null	Compliance	
ResponseTypeElementTextName	Nvarchar	500	Null	Null	Compliance	
ResponseTypeElementTextDescription	Nvarchar	4000	Null	Null	Compliance	
LanguageId	Bigint	Null	19	Null	Compliance	
LanguageCode	Nvarchar	25	Null	Null	Compliance	
CreatedById	Bigint	Null	19	Null	Compliance	
CreatedDate	Datetimeoffsett	7	Null	Null	Compliance	
CreatedDateChar	Varchar	35	Null	Null	Compliance	
ModifiedById	Bigint	Null	19	Null	Compliance	
ModifiedDate	Datetimeoffsett	7	Null	Null	Compliance	
ModifiedDateChar	Varchar	35	Null	Null	Compliance	
IsActive	Bit	Null	Null	Null	Compliance	

Field Descriptions

Name	Description	Example
ResponseTypeElementTextId	Unique identifier for all records in this API	58196
ResponseTypeElementId	Unique identifier for each Response	58200
ResponseTypeElementTextName	Text of the Response as it appears on a form	Reported a Serious Injury/Illness
ResponseTypeElementTextDescription	Text description additional to a response	Tie to an incident
LanguageId	Unique value indicating the language Id associated to the record	1
LanguageCode	Code indicating the language Id	En
CreatedById	Unique identifier associated to the creator of the record	14
CreatedDate	Indicates the date created	2020-06-12 18:55:00.8472170 +00:00

CreatedDateChar	Indicates the date created	2020-06-12 18:55:00.847217 +00:00
ModifiedById	Indicates the Id of individual that made modification	14
ModifiedDate	Date of the modification	2020-06-12 18:55:00.8472170 +00:00
ModifiedDateChar	Date of the modification	2020-06-12 18:55:00.847217 +00:00
IsActive	Indicates if a record is active or inactive	1

Sample


```
{
"ResponseTypeElementTextId":1,
"ResponseTypeElementId":1,
"ResponseTypeElementTextName":"Trucking DBE",
"ResponseTypeElementTextDescription":"",
"LanguageId":1,
"LanguageCode":"en",
"CreatedById":59,
"CreatedDate":"2019-07-24T19:28:55.5350882Z",
"CreatedDateChar":"2019-07-24 19:28:55.535088 +00:00",
"ModifiedById":59,
"ModifiedDate":"2019-07-24T19:28:55.5350882Z",
"ModifiedDateChar":"2019-07-24 19:28:55.535088 +00:00",
"IsActive":true
}
```


Validation
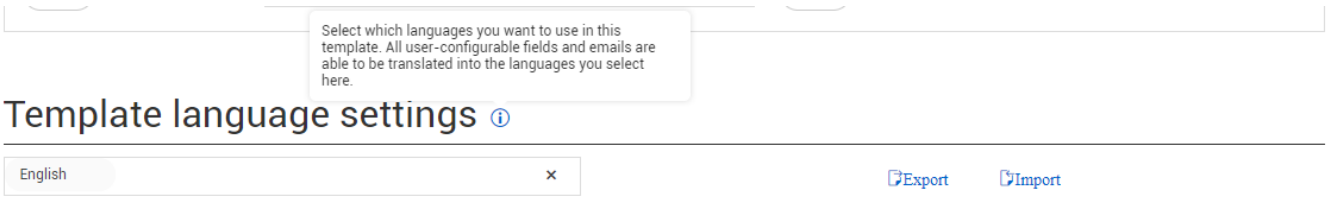
This data can be validated by navigating to the Templates manager, select a template, select the Properties tab and scroll down to the Template language settings section