Explore API Documentation

SelfService_Core_CustomLabel

Version 1.0

Last Modified: 26-Aug-2024

Last Modified By: Suresh Aitha

© 2024 InEight, Inc. All rights reserved.

Change Log

This changelog only contains significant or notable changes to the revision. Any editorial type changes or minor changes are not included.

Revision	Change Date	Description	Modified By
1.0	26-Aug-2024	Initial release	Suresh Aitha

Contents

Change Log....2
Overview....3
Relationships and Dependencies....3
API Detail....3
Supported Filters....3
Fields....3
Field Descriptions....4
Sample....4
Data Validation....5

Overview
This API exposes Master Data information about CustomLabels.

Relationships and Dependencies
This API can be joined to any other APIs where custom labels are implemented.

For example, this API could join to the SelfService_Control_PayItemCharacteristic API where PayItemUserDefined10 is equal to the SourceFieldName in the SelfService_Core_CustomLabel API to retrieve the custom name for that field.

API Detail

Direction		From Project Suite
Pagination		50,000 Rows
Frequency		All Reporting APIs are used by calling a GET method at an interval determined by the customer. InEight suggests using these APIs on an infrequent basis (once per day) to avoid potential performance impact to live systems when the returned data set could be large.
Trigger Method(s)		All default OData filters are supported
Average Payload Size		Depends on date range selected
APIM Name		SelfService_Core_CustomLabel
Replicate view		[SelfService].[vwCoreCustomLabel]
Data Refresh/Delta/Incremental Loads		The data in this API is on a trigger-based refresh, fresh data should appear in 5 minutes or less.
Project Suite	**Starting Version**	24.9
	Ending Version	N/A

Supported Filters
All default OData filters are supported by this API.

Fields

Name	Type	CharMaxLength	NumericPrecision	DatePrecision	Product	PK
CustomLabelId	bigint	NULL	NULL	NULL	Core	X
ApplicationName	nvarchar	50	NULL	NULL	Core	
LanguageId	bigint	NULL	NULL	NULL	Core	
LanguageName	nvarchar	100	NULL	NULL	Core	
LanguageDisplayId	nvarchar	6	NULL	NULL	Core	
SourceFieldName	nvarchar	250	NULL	NULL	Core	
FieldName	nvarchar	500	NULL	NULL	Core	
CustomLabel	nvarchar	500	NULL	NULL	Core	
IsActive	bit	NULL	NULL	NULL	Core	
ModifiedDate	datetimeoffset	NULL	NULL	NULL	Core	
IsCustomLabelEnabled	bit	NULL	NULL	NULL	Core	

Field Descriptions

Name	Description	Example
CustomLabelId	Uniqueidentifier of CustomLabel	100
ApplicationName	Name of the application	Master data libraries
LanguageId	Uniqueidentifier of language	1
LanguageName	Name of the language	English
LanguageDisplayId	DisplayId of the language	EN
SourceFieldName	Source Field Name	Project Information Tag 12
FieldName	Field Name	Project information tag 12
CustomLabel	Custom Label	testing pi tag 12 1
IsActive	Indicator of whether the record is still active	1
ModifiedDate	Date the record was modified	2024-08-23 18:02:44.3651654 +00:00
IsCustomLabelEnabled	Is the Custom label setting enabled	1

Sample


```
{"CustomLabelId":1,"ApplicationName":"Master data
libraries","LanguageId":1,"LanguageName":"English","LanguageDisplayId":"EN","Source
FieldName":"Account Code User Defined 1","FieldName":"ACS user defined
1","CustomLabel":"ACS user defined 1","IsActive":true,"ModifiedDate":"2024-08-
23T18:02:31.0304102Z","IsCustomLabelEnabled":true}
```

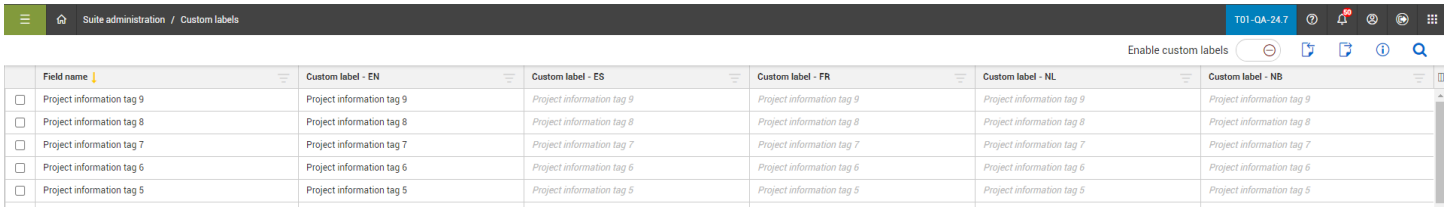
Data Validation