INEIGHT

Explore API Documentation

SelfService_Core_UserOrganization

Version 1.0

Last Modified: 11/21/2024

Last Modified By: Litzy Mora

© 2024 InEight, Inc. All rights reserved.

Change Log

This changelog only contains significant or notable changes to the revision. Any editorial type changes or minor changes are not included.

Revision	Change Date	Description	Modified By
1.0	6-Jun-2022	Initial draft	Litzy Mora

Contents

Change Log....2
Overview....3
Relationships and Dependencies....3
API Detail....3
Supported Filters....4
Fields....4
Field Descriptions....4
Sample....5
Data Validation....5

Overview

This API exposes user organization data as assigned in all projects and organizations

Relationships and Dependencies

From: Table	To: Table	Relationship	Cardinality[1]	Comment
SelfService_Core _UserOrganization(UO)	SelfService_Core_ Organizations(O)	UO.OrganizationId= O.OrganizationId	1:M	
SelfService_Core_ UserOrganization(UO)	SelfService_Core_ User(U)	UO.UserId= U.UserId	M:1	
SelfService_Core_ UserOrganization(UO)	SelfService_Core_ UserProject(UP)	UO.User_Id= UP.User_Id	1:M	
SelfService_Core_ UserOrganization(UO)	SelfService_Core_ UserAssignment(UA)	UO.User_Id= UA.UserId	1 :M	

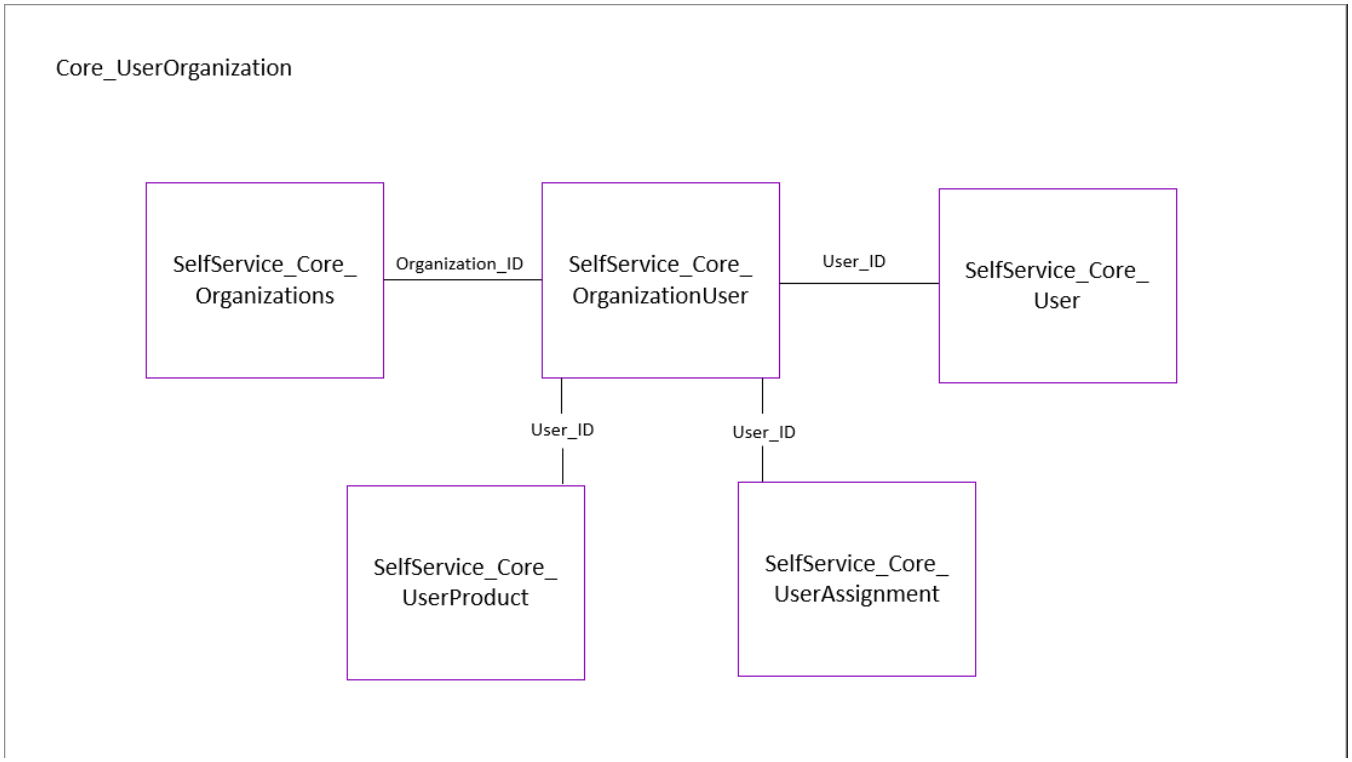

API Detail

Direction	From Project Suite
Pagination	50,000 Rows

[1] *1:M = One to Many, 1:1 = One to One, M:1 = Many to one*

Frequency		All Reporting APIs are used by calling a GET method at an interval determined by the customer. InEight suggests using these APIs on an infrequent basis (once per day) to avoid potential performance impact to live systems when the returned data set could be large.
Trigger Method(s)		All default OData filters are supported
Average Payload Size		Depends on date range selected
APIM Name		SelfService_Core_UserOrganization
Data Refresh/Delta/Incremental Loads		The data in this API is on a trigger-based refresh, fresh data should appear in 5 minutes or less.
Project Suite	**Starting Version**	22.8
	Ending Version	N/A

Supported Filters

All default OData filters are supported by this API.

Fields

Name	Type	CharMaxLength	NumericPrecision	DatePrecision	Product	PK
CreatedByFullName	nvarchar	402	0	0	Core	
CreatedByUserId	bigint	8	19	0	Core	
CreatedDate	datetimeoffset	10	34	7	Core	
FullName	nvarchar	402	0	0	Core	
IsActive	bit	1	1	0	Core	
ModifiedByFullName	nvarchar	402	0	0	Core	
ModifiedByUserId	bigint	8	19	0	Core	
ModifiedDate	datetimeoffset	10	34	7	Core	
OrganizationId	nvarchar	600	0	0	Core	
OrganizationName	nvarchar	600	0	0	Core	
SourceSystemId	bigint	8	19	0	Core	
UserId	bigint	8	19	0	Core	X

Field Descriptions

Name	Description	Example
CreatedByFullName	The name of the individual that created the record	Service Account
CreatedByUserId	User Id of the individual the created the record	1
CreatedDate	Date record was created	2017-01-26 16:48:12.0489438 +00:00
FullName	First and last name of user	Service Account
IsActive	1' means active and '0' means inactive	1

ModifiedByFullName	The name of the individual that modified the record	John Doe
ModifiedByUserId	The user id of the individual that modified the record	123930
ModifiedDate	Date record was modified	2022-06-08 12:27:46.0848221 +00:00
OrganizationId	System generated id assigned to the organization	RootOrg1
OrganizationName	The name of the specific node within the Organization Structure. If an OrganizationUnit is associated then the actual name used in the UI will come from the Organization Unit's Name.	InEight Inc
SourceSystemId	The record identifier for the Structure from an external system of record. If a value is not provided, the value of the Structure Name field will be used.	1
UserId	Id assigned to a specific user	1

Sample


```
{"Source_system_id":1,"Organization_id":"RootOrg1","Organization_name":"SInEight Inc","User_id":1,"Full_name":"Service Account","Created_by_user_id":1,"Created_by_full_name":"Service Account","Created_date":"2017-01-26T16:48:12.0489438Z","Modified_by_user_id":123930,"Modified_by_full_name":"John Doe","Modified_date":"2022-06-08T12:27:46.0848221Z","Is_active":true}
```


Data Validation

This data can be validated by navigating to All projects and organizations, selecting organizations, the info icon and then Users.

Figure 1: All projects and organizations > Organizations > Info icon > Users

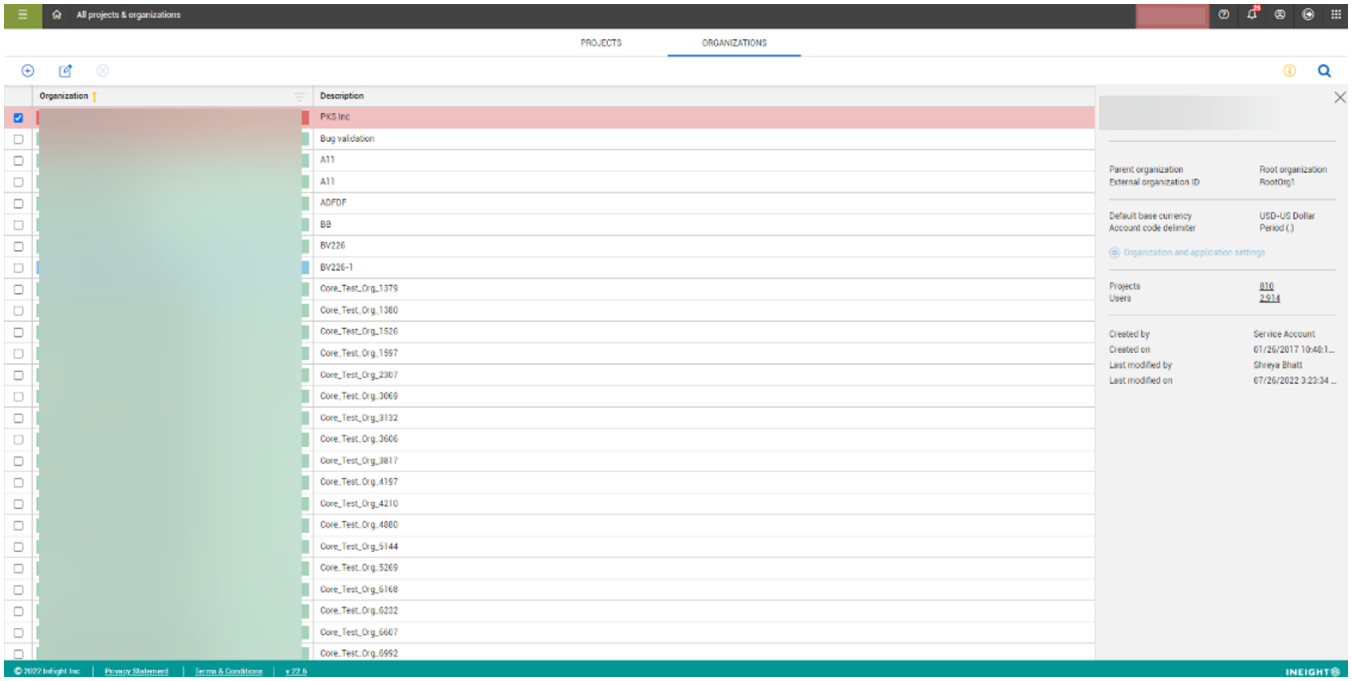
All projects & organizations
PROJECTS
ORGANIZATIONS
Organization
Description
PKS Inc
Bug validation
A11
A11
ADFDF
BB
BV226
BV226-1
Core_Test_Org_1379
Core_Test_Org_1380
Core_Test_Org_1526
Core_Test_Org_1597
Core_Test_Org_2307
Core_Test_Org_3069
Core_Test_Org_3132
Core_Test_Org_3606
Core_Test_Org_3817
Core_Test_Org_4197
Core_Test_Org_4210
Core_Test_Org_4860
Core_Test_Org_5144
Core_Test_Org_5269
Core_Test_Org_6168
Core_Test_Org_6232
Core_Test_Org_6607
Core_Test_Org_6992
Parent organization
External organization ID
Root organization
RootOrg1
Default base currency
Account code delimiter
USD-US Dollar
Period (.)
Organization and application settings
Projects
Users
810
2,914
Created by
Created on
Last modified by
Last modified on
Service Account
01/26/2017 10:48:1...
Shreya Bhatt
07/26/2022 3:23:34 ...
© 2022 Infight Inc.
Privacy Statement
Terms & Conditions
v 22.6
INEIGHT